

# Micro Excavators 750Kg to 1T

**Micro Excavators 750Kg to 1.2T  
Drilling Diameter 100 to 300mm  
S1/S2 Auger Range**

**I 200  
Earth Drill**

<b>Earth Drill Model</b>	<b>I 200</b>
Part Number	21 - 10100
Excavator Machine Weight	750kg to 1T
Torque	1189 Nm
Pressure	185 Bar
Oil Flow Range	15 to 32 l/m
Hydraulic Hoses / QRCs	1/2" BSP
Output Shaft (STD)	External 50mm Round (S2) Internal to suit STIHL (S1)
Unit Weight	35kg
Unit Height	450mm
Unit Diameter	160mm
Auger Series	S2 (option S1)
Length	900mm
Auger Diameter Range	100-300mm

## S1 Auger Range - STIHL Drive (Length 900mm) for I 200 Earth Drill


### Earth and Clay Drilling (Complete with Earth Teeth and Earth Pilot)

Diameter	100mm	150mm	200mm	225mm	250mm	300mm
Part Number	30-10101000	30-10151000	30-10201000	30-10231000	30-10251000	30-10301000

## S2 Auger Range - 50mm Round Drive (Length 900mm) for I 200 Earth Drill


### Earth and Clay Drilling (Complete with Earth Teeth and Earth Pilot)

Diameter	100mm	150mm	200mm	225mm	250mm	300mm
Part Number	30-20101100	30-20151100	30-20201100	30-20231100	30-20251100	30-20301100

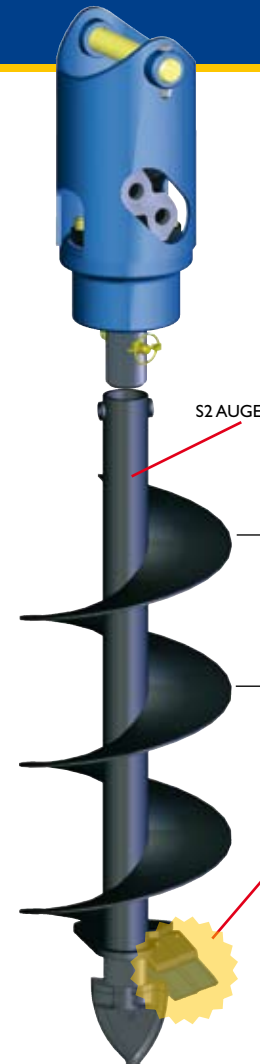

## Mounting Hitch Options

Pin Size	Part Number
25mm	11-302500-1200
30mm	11-303000-1200

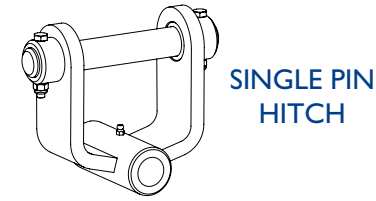

Hydraulic Hoses & QRC's are supplied but not shown



**Augers** with shallow pitch flights for more effective soil removal

**DON'T LEAVE "YA" TEETH DOWN THE HOLE!**

**Shock Lock™ Patent Applied**

- The Shock Lock™ system is unique to AugerTorque.
- Shock Lock™ has a "Shock" Absorbing Element which increases the life of Tungsten Teeth
- A solid pin "Lock" system prevents the loss of Teeth but also allows for fast replacement in the field