



# MULCHER



## IDEAL FOR FOREST CARE, PARKS AND GARDEN MAINTENANCE

**Heavy operations such as bushwood clearance or land maintenance are perfect applications for the Cangini Mulcher/flail.**

This attachment is rugged and durable, thanks above all to its reinforced casing with double bottom, which provides outstanding resistance to impacts and torsional forces. The shielded bearings of the rollers protect them from collisions with material in the mulching area. Use this renowned attachment on excavators from 1.5T to 6.5T.

### Reinforced body

Double reinforced body for higher resistance to shocks



### Integrated Valve Unit

Throttle, pressure relief and bypass valves

### Gear Motor

Motor with reinforced seals in case of back pressure higher than 10 bar

### Shaft with Hammers

Suitable for cutting shrubs or similar plants

### Shaft with Blades

Suitable for cutting grass or similar vegetation

### Coupling Adjustment Slide

The coupling position can be differently adjusted.

[www.augertorque.com](http://www.augertorque.com)

CALL 13 22 12

EMAIL [sales@augertorque.com.au](mailto:sales@augertorque.com.au)

OR CONTACT YOUR NEAREST DEALER

## Features


- ▶ Shaft equipped with either blade or hammer set up
- ▶ Adjustable height support roller
- ▶ High quality motor and hoses
- ▶ Self levelling frontal plane
- ▶ Highly resistant with an integrated valve unit as standard

## Applications

- ▶ Ground clearance
- ▶ Woodland pathway creation and maintenance
- ▶ Clear and maintain vegetation
- ▶ Tree and hedge trimming
- ▶ Mulch trees and hedges down to ground level
- ▶ Cut shrubs up to 10cm in diameter

## Specifications

Models		TC1-80	TC2-80	TC2-100
Carrier weight		1.5 - 3.5T	3.5 - 6.5T	3.5 - 6.5T
Drum width	mm (inch)	800 (31)	800 (31)	1000 (39)
Overall width	mm (inch)	1000 (39)	980 (39)	1180 (46)
Depth	mm (inch)	640 (25)	810 (32)	810 (32)
Height	mm (inch)	461 (18)	530 (21)	530 (21)
Weight	kg (lbs)	115 (254)	245 (540)	270 (595)
Flow rate	lpm (gpm)	18 - 90 (5 - 24)	28 - 90 (7 - 24)	28 - 90 (7 - 24)
Pressure	bar (psi)	250 (3626)	250 (3626)	250 (3626)
Cutting diameter	mm (inch)	20 - 30 (0.8 - 1.2)	40 - 60 (1.6 - 2.4)	40 - 60 (1.6 - 2.4)
with hammer				

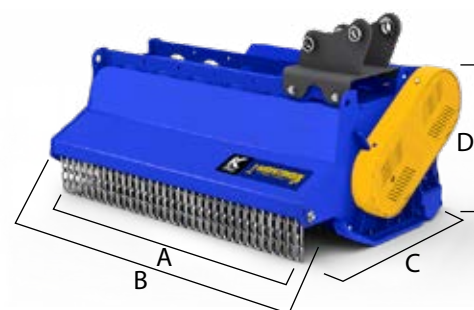

Part of the Auger Torque landscaping range

STUMP PLANERS | LOG SPLITTERS | MULCHERS | HEDGE TRIMMERS | SWEEPER BROOMS

[www.augertorque.com](http://www.augertorque.com)

CALL 13 22 12 | EMAIL [sales@augertorque.com.au](mailto:sales@augertorque.com.au)

OR CONTACT YOUR NEAREST DEALER