



PRODUCT GUIDE

DELIVERING GROUNDBREAKING PERFORMANCE



AUSTRALIA
ISSUE 15-3



Auger Torque USA



Auger Torque China

A Customer-Driven Global Company

Established in Europe in 1998, Auger Torque has created a new standard in the Earth Drill and Trencher Attachment market by putting you, the customer, at the centre of everything we do.

In 2005, after surveying the market carefully, we released a new range of innovative products, designed to provide unrivalled reliability and cost effective operation.

Auger Torque is proud to have become part of the Kinshofer Group of companies in 2015. With the backing of the German attachments giant Auger Torque has since enjoyed even greater growth in all areas of its business operations.

Auger Torque's five manufacturing bases around the globe are busy satisfying the ever-growing demand for high-quality products in over seventy countries and on all seven continents.

Auger Torque - A manufacturing company with Global distribution and dealer networks.



Auger Torque Europe



Auger Torque Australia

INDEX

EARTH DRILLS	8
TRUCK CRANES & ROPE WIND HITCH	26
AUGERS & WEAR PARTS	30
HARD ROCK AUGER	40
HIGH TORQUE EARTH DRILLS	42
SCREW PILE INSTALLATIONS	46
TRENCHERS	48
ALUMINIUM RAMPS	54
PALLET FORKS	55
MIXER BOWLS	56
CONE CRUSHER BUCKET	57
DRUM CUTTER	58
HEDGE TRIMMER	59
MULCHERS	60
STUMP PLANERS	62
LOG SPLITTER	64




Innovation and Special Features



Robust Construction

DURABILITY

- Manufactured from high grade materials and precision engineered components
- Designed to withstand extreme working conditions
- High grade synthetic gear oil used for extra protection and long service life



Non-Dislodgement Shaft

SECURITY


- Unique design
- Single piece drive shaft
- Lifetime warranty against shaft dislodgement



Pilots

TOUGHNESS & ACCURACY

- Earth, Tungsten, Extra Dig and Rock Pilots
- Tough forged construction
- Easy fitting



Planetary Gearbox

POWER

- Designed, manufactured and assembled by Auger Torque
- Torque amplified
- High efficiency
- Extreme durability



Shallow Pitch Flights

EFFICIENCY

- Piling industry technology
- Holds earth on flights on removal
- Most efficient ratio between quantity of earth removed and speed of operation



Pilot Extensions

ACCURACY

- Allows an auger to hold its axis accurately in tough ground conditions
- Improves performance on sloping ground
- Simple fitting



Telescopic Extensions


ADAPTABILITY

- Improves efficiency for deep hole drilling
- Innovative design significantly reduces swap-over time
- Easy adjustment to 3 heights
- Available for S5, S6 and PA augers

Constant Spiral Cut

IMPROVED PRODUCTIVITY

- Fresh cut every revolution
- Tooth holders angled to direct spoil onto auger flights efficiently
- Spoil broken up thoroughly
- Avoids clogging





Sometimes it's the simple ideas that work best and Auger Torque has always led the industry with creative design. In a world where maximising profit is vital to any business, we believe that our range of high quality attachments will allow you to exploit the full potential of your existing plant.



Cradle Hitch

INGENUITY

- Controlled ground contact
- Facilitates horizontal drilling
- Additional locking system
- Helps with maintenance in situ
- Aids multi-tool functionality
- Easy on-site handling



2 Way Valve Kits

FLEXIBILITY

- Converts single acting hammer circuit into a 2 way auxiliary flow circuit



Pressure Relief Valve

SAFETY

- Helps prevent overloading of the hydraulic circuit
- Protects the hydraulic motor


Designed

Designed for Your Environment

At Auger Torque we realise that one of the best ways to continually improve our extensive range of quality attachments is to not only listen to customer feedback but to put practical ideas into production. This policy of direct customer involvement has given us the reputation of being the specialists in the trenching and auger drive industry world-wide.



Our products incorporate many development features. The trench cleaner on our Trencher Attachments ensures a good clean cut with no residual spoil.

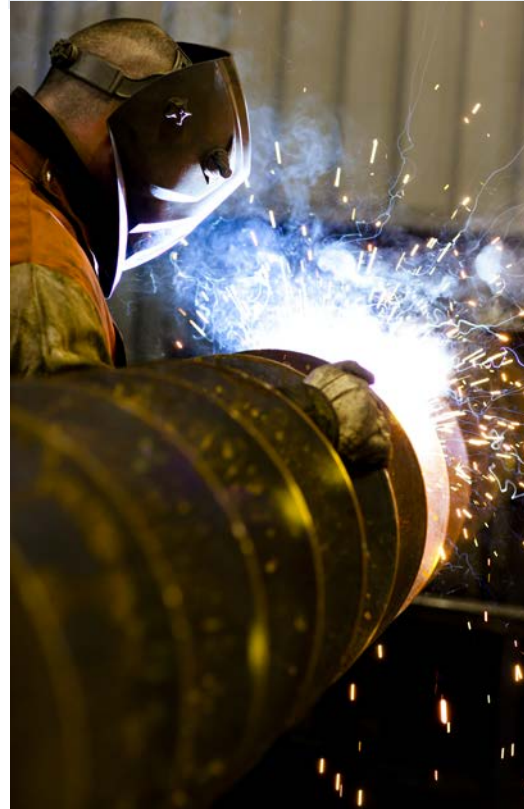

Quality is at the forefront of our philosophy.



Our R&D Test Facility puts our attachments through rigorous test procedures that exceed real-life demands.



All of our gearboxes use precision engineered components.



SHOCK LOCK™

Tooth Locking System


Are you tired of losing your teeth down the hole?

With our Original **Shock Lock™** Tooth Locking System this is now a thing of the past. Using the **Shock Lock™** pin and rubber insert in our unique **Shock Lock™** tooth holders ensures your Auger teeth are safely locked in place and protected against shock fractures.

Replacing worn teeth is a breeze with this system, simply knock out the old pin with a standard hole punch and the tooth will slide out of the pocket with ease.

Acclaimed as the best system on the market you will never need to worry about fitting spare teeth due to loss again.

**"Don't leave
your teeth
down the hole!"**

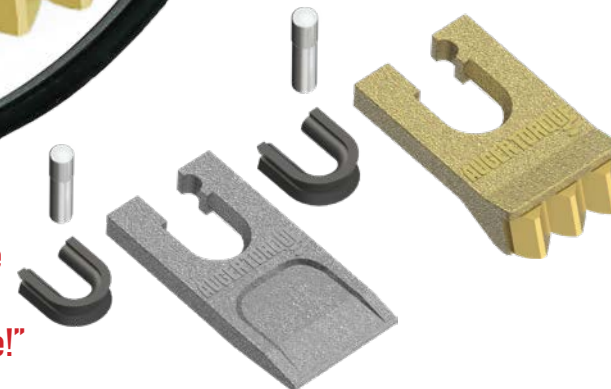

**Original
Auger Torque
Design**

EARTH DRILLS

Features of our Earth Drills

FORGED HOOD EARS

Standard with all Earth Drills in areas that we know will take a lot of strain. All hood pins are locked for extra safety making it impossible for the hood to detach from your hitch.

HOSES & ADAPTORS

All Earth Drills come standard with high quality hoses and adaptors (excludes larger units. QRC's not included).

ROBUST HYDRAULIC MOTORS


Auger Torque's huge buying power means we work closely with high quality suppliers to develop the most reliable attachments available on the market today.

EPICYCLIC GEARBOX

Torque is amplified by using the unique Auger Torque planetary gearbox. This system allows the motors output torque to be multiplied with extreme efficiency as well as ensuring the durability and reliability you need.

NON-DISLODGE- MENT SHAFT

Unique to Auger Torque, the Non-Dislodgement Shaft is a single piece drive shaft assembled top down and locked into the Earth Drill housing. This design guarantees that the shaft will never fall out, making for a safer work environment, not only for the operator but also any surrounding workers, a **MUST-HAVE FEATURE** for any safety conscious company.

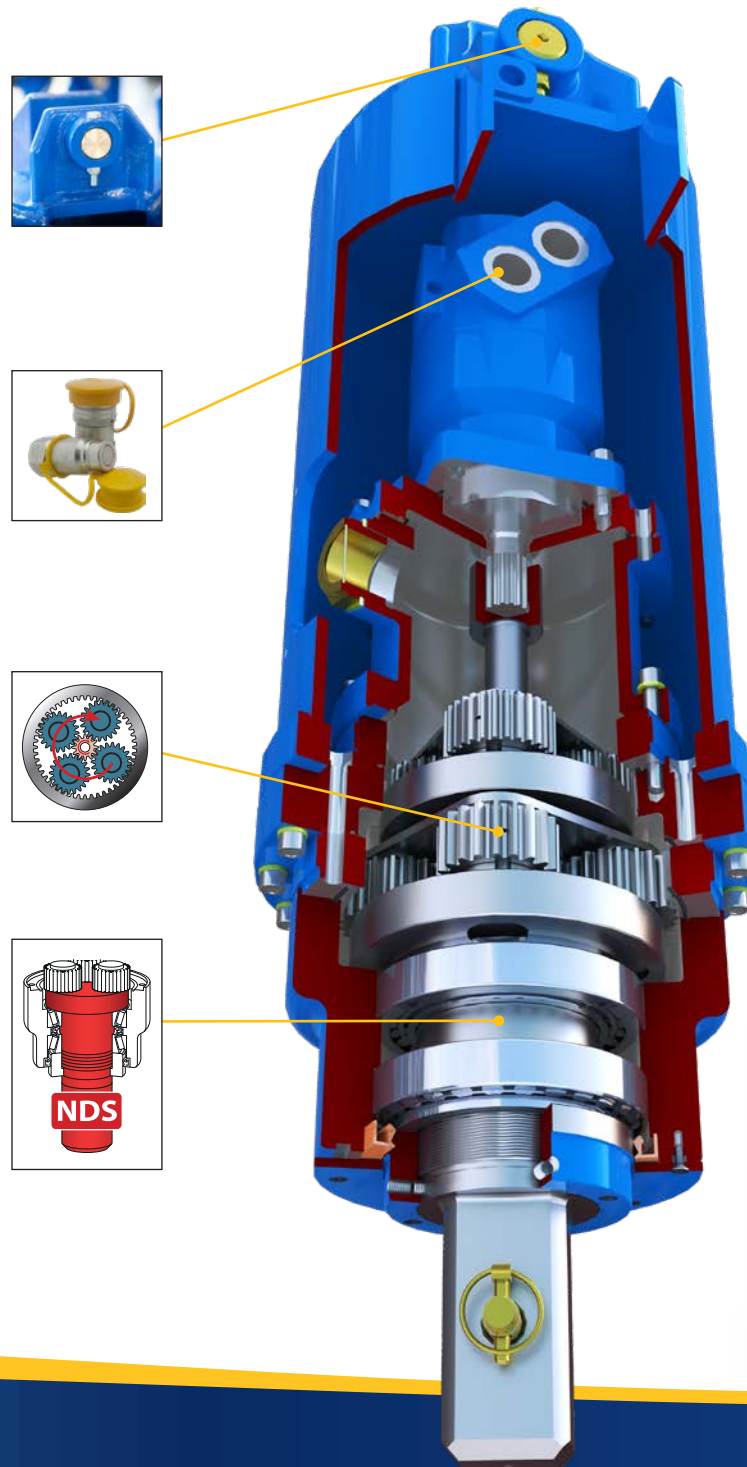

**WATCH
VIDEO**





MICRO EXCAVATORS 0.75 - 1 T

S2 AUGERS 100mm-300mm Dia

Torque Range: 189-1,164 Nm
Oil Pressure Range: 30-185 Bar
Oil Flow Range: 15-32 lpm
Speed Range: 38-81 rpm
Unit Height: 450mm
Unit Diameter: 168mm
Unit Weight: 35 kg
Output Shaft: 50mm Round
Stihl



Single Pin Hitch



50mm Round
Stihl Coupling

The Output Shaft on the 1200 Earth Drill can accept the Stihl coupling directly to the shaft.

AUGER DIA (mm)	DRILLING DEPTH METRES**	
	SOFT	MEDIUM
100	0.9M	0.9M
150	↓	↓
200	↓	↓
225	0.9M	0.9M
250	0.9M	0.9M
300	0.9M	0.9M

*These charts have been created as a guide only. Actual performance figures may differ.

** The data shown has been obtained, by Auger Torque, in a controlled environment. Auger Torque cannot guarantee that this environment can be replicated and as such cannot accept liability if these figures cannot be achieved.

***Any data or specification contained within this documentation may be subject to change without prior notification.

For further information please contact your authorised Auger Torque distributor.

AUGER SUMMARY


Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.

S2 AUGERS

Auger Torque S2 Augers feature extra long flighted sections of shallow pitch flights. The Augers are fitted with **Earth or Tungsten Teeth** and **Pilot**.


Available as standard in the following diameters:

100mm	200mm	250mm
150mm	225mm	300mm

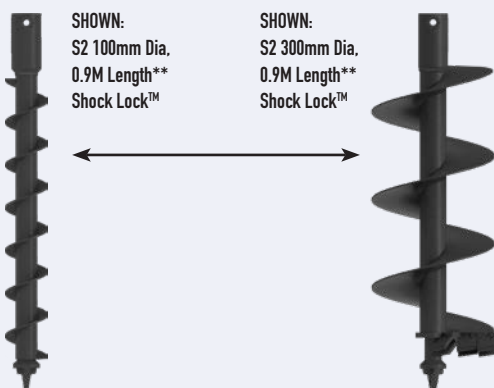

SHOCK LOCK™ Tooth Locking System

DON'T LEAVE
YOUR TEETH
DOWN THE
HOLE!



** Auger lengths stated include fitted wear parts.



IDEAL FOR FENCING

The Earth Drill 1200 is Auger Torque's entry level model however its compact size and robust construction and ability to turn a 300mm Auger make it very popular in the fencing industry.



MINI EXCAVATORS 1 - 2 T

S4 AUGERS
100mm-400mm Dia

Torque Range: 511-1,496 Nm
Oil Pressure Range: 70-205 Bar

Oil Flow Range: 20-45 lpm
Speed Range: 44-98 rpm

Unit Height: 585 mm
Unit Diameter: 200 mm
Unit Weight: 46 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Output Shaft: 65mm Round
(Output Shaft adaptors available)



Double Pin Hitch



Double Pin
Cradle Hitch



65mm
Round



MINI EXCAVATORS 1 - 2.5 T

S4 AUGERS
100mm-450mm Dia

Torque Range: 639-2,190 Nm
Oil Pressure Range: 70-240 Bar

Oil Flow Range: 25-57 lpm
Speed Range: 43-99 rpm

Unit Height: 585 mm
Unit Diameter: 200 mm
Unit Weight: 47 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Output Shaft: 65mm Round
(Output Shaft adaptors available)



Double Pin Hitch



Double Pin
Cradle Hitch



65mm
Round



MINI EXCAVATORS 1.5 - 3 T

S4 AUGERS
100mm-500mm Dia

Torque Range: 830-2,847 Nm
Oil Pressure Range: 70-240 Bar

Oil Flow Range: 27-65 lpm
Speed Range: 36-87 rpm

Unit Height: 585 mm
Unit Diameter: 200 mm
Unit Weight: 48 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Output Shaft: 65mm Round
(Output Shaft adaptors available)



Double Pin Hitch



Double Pin
Cradle Hitch



65mm
Round



Locking Kit



MINI EXCAVATORS 2 - 4 T

S4 AUGERS
100mm-600mm Dia

Torque Range: 959-2,877 Nm
Oil Pressure Range: 80-240 Bar

Oil Flow Range: 27-75 lpm
Speed Range: 36-100 rpm

Unit Height: 665mm
Unit Diameter: 244mm
Unit Weight: 71 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Output Shaft: 65mm Round
(Output Shaft adaptors available)



Double Pin Hitch



Double Pin
Cradle Hitch



65mm
Round



Locking Kit

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	2M	1.8M	1.6M
150	2M	1.8M	1.6M
200	1.8M	1.6M	1.4M
225	1.8M	1.6M	1.4M
250	1.5M	1.4M	1.3M
300	1.5M	1.4M	1.3M
350	1.5M	1.4M	1.3M
400	1.2M	1.1M	1M

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	2.2M	2M	1.8M
150			
200			
225			
250	↓	↓	↓
300	2.2M	2M	1.8M
350	2M	1.8M	1.6M
400	1.5M	1.4M	1.3M
450	1.2M	1.1M	1M

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	2.5M	2.3M	2.1M
150			
200			
225			
250	↓	↓	↓
300	2.5M	2.3M	2.1M
350	2.3M	2.1M	1.9M
400	1.9M	1.7M	1.5M
450	1.7M	1.5M	1.4M
500	1.5M	1.4M	1.3M

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	3M	2.7M	2.4M
150			
200			
225			
250			
300			
350	↓	↓	↓
400	3M	2.7M	2.4M
450	2.6M	2.3M	2.1M
500	2.3M	2.1M	1.9M
600	1.8M	1.6M	1.4M

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	2.7M	2.7M	2.4M
150			
200			
225			
250			
300			
350			
400			
450			
500	2.7M	2.7M	2.4M
600	2.6M	2.6M	2.3M
750	1.6M	1.6M	1.4M



MINI EXCAVATORS 2.5 - 4.5 T

S4 AUGERS 100mm-750mm Dia

Torque Range: 1,205-3,614 Nm
Oil Pressure Range: 80-240 Bar
Oil Flow Range: 40-85 lpm
Speed Range: 42-90 rpm
Unit Height: 665mm
Unit Diameter: 244mm
Unit Weight: 73 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Output Shaft: 65mm Round
(Output Shaft adaptors available)



Double Pin Cradle Hitch



65mm Round



Locking Kit



MINI EXCAVATORS 3 - 5 T

S4 AUGERS 100mm-900mm Dia

Torque Range: 1,574-4,721 Nm
Oil Pressure Range: 80-240 Bar
Oil Flow Range: 50-95 lpm
Speed Range: 40-77 rpm
Unit Height: 665mm
Unit Diameter: 244mm
Unit Weight: 75 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Output Shaft: 65mm Round
(Output Shaft adaptors available)



Double Pin Cradle Hitch



65mm Round



Locking Kit

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	4M	3.6M	3.2M
150			
200			
225			
250			
300			
350			
400			
450			
500			
600	4M	3.6M	3.2M
750	2.5M	2.3M	2.1M
800	2M	1.8M	1.6M
900	1.5M	1.4M	1.3M

AUGER SUMMARY

Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.

S4 AUGERS

Auger Torque S4 Augers feature extra long flighted sections of shallow pitch flights. **Earth, Tungsten, Rock, Hard Rock** and **Extra Dig** variations are available.

Available as standard in the following diameters:

100mm	300mm	600mm
150mm	375mm	750mm
200mm	400mm	800mm
225mm	450mm	900mm
250mm	500mm	

S4 EXTENSIONS

S4 Auger Extensions are available in the following lengths:


500mm

1M

(other lengths on request)



SHOWN:
S4 100mm Dia,
1.2M Length**
Shock Lock™

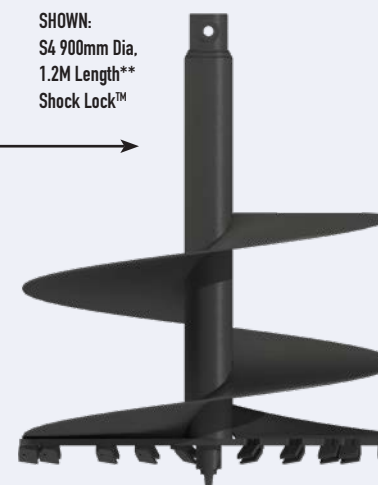


SHOWN:
S4 900mm Dia,
1.2M Length**
Shock Lock™

SHOWN:
S4 1M
Extension



SHOCK LOCK™
Tooth Locking System

DON'T LEAVE YOUR TEETH
DOWN THE HOLE!



** Auger lengths stated include fitted wear parts.



EXCAVATORS 4.5 - 6 T

S5 AUGERS 150mm-900mm Dia

Torque Range: 1,685-5,477 Nm
Oil Pressure Range: 80-260 Bar
Oil Flow Range: 40-115 lpm
Speed Range: 30-87 rpm
Unit Height: 780mm
Unit Diameter: 269mm
Unit Weight: 108 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Optional Extras: 2 Way Valve
Output Shaft Std: 75mm Square
(Output Shaft adaptors available)



Cradle Hitch Single Pin Hitch



Locking Kit



75mm Square



2 Way Valve
Converts single acting hammer circuit into 2 Way auxiliary flow

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	4M	3.6M	3.2M
200			
225			
250			
300			
350			
400			
450			
500			
600	4M	3.6M	3.2M
750	3M	2.7M	2.4M
800	2.5M	2.3M	2.1M
900	2M	1.8M	1.8M



EXCAVATORS 5 - 7 T

S5 AUGERS 150mm-900mm Dia

Torque Range: 2,133-6,931 Nm
Oil Pressure Range: 80-260 Bar
Oil Flow Range: 60-135 lpm
Speed Range: 36-81 rpm
Unit Height: 780mm
Unit Diameter: 269mm
Unit Weight: 112 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Optional Extras: 2 Way Valve
Output Shaft Std: 75mm Square
(Output Shaft adaptors available)



Cradle Hitch Single Pin Hitch



Locking Kit



75mm Square



2 Way Valve
Converts single acting hammer circuit into 2 Way auxiliary flow

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	5M	4.5M	4.1M
200			
225			
250			
300			
350			
400			
450			
500	5M	4.5M	4.1M
600	4.3M	4M	3.7M
750	3.5M	3.2M	2.9M
800	3M	2.7M	2.4M
900	2.5M	2.3M	2.1M



EXCAVATORS 6 - 8 T

S5 AUGERS 150mm-1.2M Dia

Torque Range: 2,717-8,152 Nm
Oil Pressure Range: 80-240 Bar
Oil Flow Range: 70-150 lpm
Speed Range: 33-70 rpm
Unit Height: 780mm
Unit Diameter: 269mm
Unit Weight: 116 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Optional Extras: 2 Way Valve
Output Shaft Std: 75mm Square
(Output Shaft adaptors available)



Cradle Hitch Single Pin Hitch



Locking Kit



75mm Square



2 Way Valve
Converts single acting hammer circuit into 2 Way auxiliary flow

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	6M	5.4M	4.9M
200			
225			
250			
300			
350			
400	6M	5.4M	4.9M
450	5M	4.5M	4.1M
500	5M	4.5M	4.1M
600	5M	4.5M	4.1M
750	4M	3.6M	3.2M
800	4M	3.6M	3.2M
900	3.5M	3.2M	2.9M
1000	3.5M	2.9M	2.9M
1200	3M	2.7M	2.4M



AUGER SUMMARY

Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.

S5 AUGERS

Auger Torque S5 Augers feature extra long flighted sections of shallow pitch flights. **Earth, Tungsten, Rock, Hard Rock** and **Extra Dig** variations are available.

Available as standard in the following diameters:

150mm	350mm	750mm
200mm	400mm	800mm
225mm	450mm	900mm
250mm	500mm	1M
300mm	600mm	1.2M

S5 EXTENSIONS

Available in the following lengths:

1M	1.5M
2M	


S5 TELESCOPIC

Available in the following lengths:

1.5M	2M
------	----



SHOWN:
S5 150mm Dia,
1.5M Length
Shock Lock™
Rock Augers are
also available.

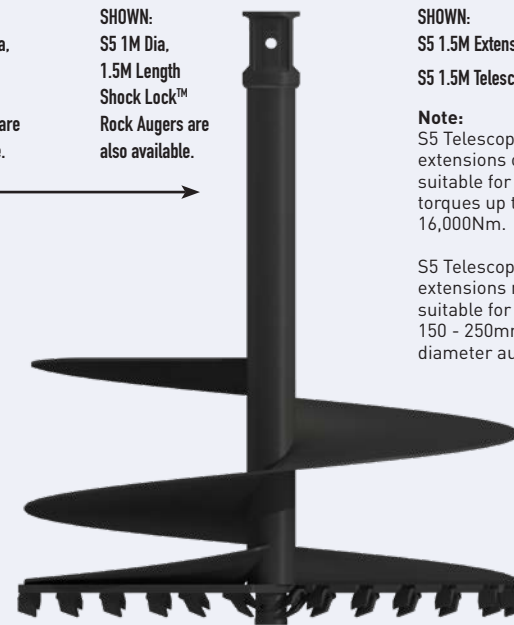


SHOWN:
S5 1M Dia,
1.5M Length
Shock Lock™
Rock Augers are
also available.

SHOWN:
S5 1.5M Extension
S5 1.5M Telescopic


Note:
S5 Telescopic
extensions only
suitable for
torques up to
16,000Nm.

S5 Telescopic
extensions not
suitable for
150 - 250mm
diameter augers.

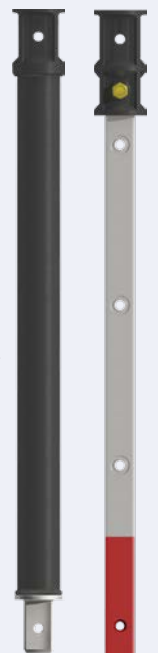

SHOCK LOCK™
Tooth Locking System

DON'T LEAVE YOUR TEETH
DOWN THE HOLE!



Augers shown feature
Shock Lock™ Toothholders.
Rock Teeth Augers are also
available.



EXCAVATORS 8 - 13 T

S6 AUGERS 150mm-1.2M Dia

Torque Range: 3,998-11,995 Nm
Oil Pressure Range: 80-240 Bar
Oil Flow Range: 80-170 lpm
Speed Range: 25-54 rpm
Unit Height: 930mm
Unit Diameter: 290mm
Unit Weight: 172 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Optional Extras: Pressure Relief Valve
2 Way Valve

Output Shaft Std: 75mm Square

Case Drain Line: Recommended



EXCAVATORS 10 - 15 T

S6 AUGERS 150mm-1.2M Dia

Torque Range: 5,024-15,071 Nm
Oil Pressure Range: 80-240 Bar
Oil Flow Range: 80-170 lpm
Speed Range: 20-43 rpm
Unit Height: 930mm
Unit Diameter: 290mm
Unit Weight: 173 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Optional Extras: Pressure Relief Valve
2 Way Valve

Output Shaft Std: 75mm Square

Case Drain Line: Recommended

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	7M	6.3M	5.7M
200			
225			
250			
300			
350			
375	↓	↓	↓
400	7M	6.3M	5.7M
450	6.5M	5.9M	5.3M
500	6.5M	5.9M	5.3M
600	6.5M	5.9M	5.3M
750	5.5M	5.4M	4.5M
800	5.5M	5M	4.5M
900	5M	5M	4.1M
1000	4.5M	4.5M	3.7M
1200	4.2M	3.7M	3M



GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	7.5M	6.8M	6.1M
200			
225			
250			
300			
350			
400	7.5M	6.8M	6.1M
450	7M	6.3M	5.7M
500	7M	6.3M	5.7M
600	7M	6.3M	5.7M
750	6M	5.4M	4.9M
800	6M	5.4M	4.9M
900	5.5M	5M	4.5M
1000	5M	4.5M	4.1M
1200	4.5M	4.1M	3.7M





AUGER SUMMARY

Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.

S6 AUGERS

Auger Torque S6 Augers feature extra long flighted sections of shallow pitch flights. **Earth, Tungsten, Rock** and **TCH** variations are available.

Available as standard in the following diameters:

150mm	300mm	500mm	900mm
200mm	350mm	600mm	1M
225mm	400mm	750mm	1.2M
250mm	450mm	800mm	

S6 EXTENSIONS

Available in the following lengths:

1.5M 2M 2.5M 3M

S6 TELESCOPIC


Available in the following lengths:

1.5M 2M



SHOCK LOCK™
Tooth Locking System

DON'T LEAVE YOUR TEETH
DOWN THE HOLE!



Augers shown feature
Shock Lock™ Toothholders.
Rock Teeth Augers are also
available.



EXCAVATORS 13 - 20 T

S6 AUGERS 150mm-1.2M Dia

Torque Range: 13,043-19,564 Nm
Oil Pressure Range: 160-240 Bar
Oil Flow Range: 80-170 lpm
Speed Range: 16-33 rpm
Unit Height: 1130mm
Unit Diameter: 345mm
Unit Weight: 268 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Optional Extras: Pressure Relief Valve
2 Way Valve

Output Shaft: 75mm Square

Case Drain Line: Recommended



Single Pin Hitch



75mm Square



Bolt On Pressure Relief Valve



Double Pin Cradle Hitch



2 Way Valve
Converts single acting hammer circuit into 2 Way auxiliary flow



EXCAVATORS 15 - 22 T

S6 AUGERS 150mm-1.5M Dia

Torque Range: 16,503-24,755 Nm
Oil Pressure Range: 160-240 Bar
Oil Flow Range: 80-170 lpm
Speed Range: 12-26 rpm
Unit Height: 1130mm
Unit Diameter: 345mm
Unit Weight: 269 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Optional Extras: Pressure Relief Valve
2 Way Valve

Output Shaft: 75mm Square

Case Drain Line: Recommended



Double Pin Hitch



Single Pin Hitch



75mm Square



Bolt On Pressure Relief Valve



Double Pin Cradle Hitch



2 Way Valve
Converts single acting hammer circuit into 2 Way auxiliary flow

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	8.5M	7.7M	6.9M
200			
225			
250			
300			
350			
400	8.5M	7.7M	6.9M
450	8M	7.2M	6.5M
500	8M	7.2M	6.5M
600	8M	7.2M	6.5M
750	7M	6.3M	5.7M
800	7M	6.3M	5.7M
900	6.5M	5.9M	5.3M
1000	6M	5.4M	4.9M
1200	5.5M	5M	4.5M

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	9M	8.1M	7.3M
200			
225			
250			
300			
350			
400	9M	8.1M	7.3M
450	8.5M	7.7M	6.9M
500	8.5M	7.7M	6.9M
600	8.5M	7.7M	6.9M
750	7.5M	6.8M	6.1M
800	7.5M	6.8M	6.1M
900	7M	6.3M	5.7M
1000	6.5M	5.9M	5.3M
1200	6M	5.4M	4.9M
1500	5M	4.5M	4.1M

*These charts have been created as a guide only. Actual performance figures may differ.

** The data shown has been obtained, by Auger Torque, in a controlled environment. Auger Torque cannot guarantee that this environment can be replicated and as such cannot accept liability if these figures cannot be achieved.

***Any data or specification contained within this documentation may be subject to change without prior notification. For further information please contact your authorised Auger Torque distributor.





AUGER SUMMARY

Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.

S6 AUGERS

Auger Torque S6 Augers feature extra long flighted sections of shallow pitch flights. **Earth, Tungsten, Rock** and **TCH** variations are available.

Available as standard in the following diameters:

150mm	300mm	500mm	900mm
200mm	350mm	600mm	1M
225mm	400mm	750mm	1.2M
250mm	450mm	800mm	1.5M

S6 EXTENSIONS

Available in the following lengths:


1.5M 2M 2.5M 3M



SHOWN:
S6 150mm Dia,
1.88M Length
Shock Lock™
Rock Augers are
also available.



SHOWN:
S6 1.5M Dia,
1.88M Length
Shock Lock™
Rock Augers are
also available.

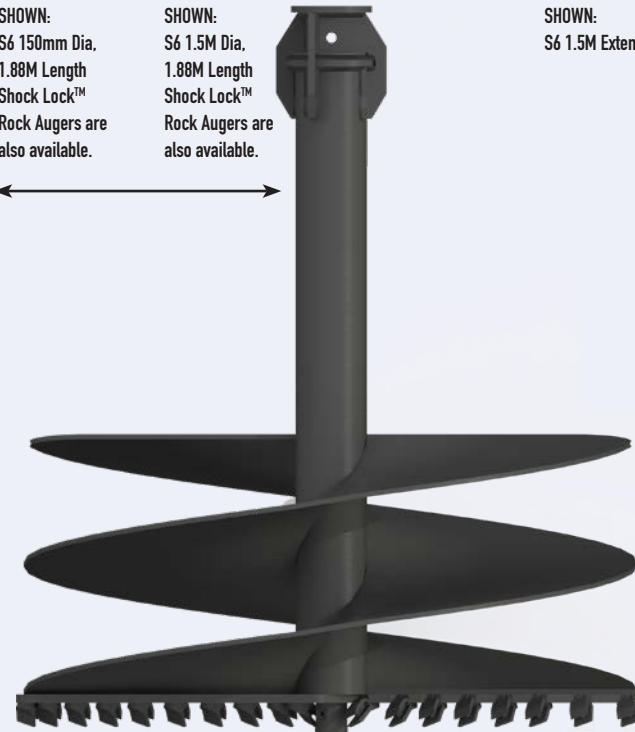

SHOWN:
S6 1.5M Extension



SHOCK LOCK™
Tooth Locking System

DON'T LEAVE YOUR TEETH
DOWN THE HOLE!



Augers shown feature
Shock Lock™ Toothholders.
Rock Teeth Augers are also
available.



EXCAVATORS 20 - 45 T

PA SERIES AUGERS 300mm-1.5M Dia

Torque Range: 20,937-33,500 Nm
Oil Pressure Range: 150-240 Bar
Oil Flow Range: 100-225 lpm
Speed Range: 11-26 rpm
Unit Height: 1411mm
Unit Diameter: 406mm
Unit Weight: 442 kg
Output Shaft Std: 110mm Square
(Output Shaft adaptors available)

Case Drain Line: **Mandatory**



110mm
Square



Single Pin Hitch

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
300	10.5M	9.5M	8.6M
350	10.5M	9.5M	8.6M
400	10M	9M	8.1M
450	10M	9M	8.1M
500	9.5M	8.6M	7.7M
600	9M	8.1M	7.3M
750	9M	8.1M	7.3M
800	9M	8.1M	7.3M
900	8.5M	7.7M	6.9M
1000	8M	7.2M	6.5M
1200	7.5M	6.8M	6.1M
1500	7M	6.3M	5.7M



Double Pin
Cradle Hitch



2 Way Valve
Converts single
acting hammer
circuit into 2 Way
auxiliary flow



Adaptor Plate
for 35,000MAX



EXCAVATORS 20 - 45 T

PA SERIES AUGERS 300mm-1.8M Dia

Torque Range: 24,925-42,729 Nm
Oil Pressure Range: 140-240 Bar
Oil Flow Range: 100-225 lpm
Speed Range: 9-20 rpm
Unit Height: 1411mm
Unit Diameter: 406mm
Unit Weight: 442 kg
Output Shaft Std: 110mm Square
(Output Shaft adaptors available)

Case Drain Line: **Mandatory**



110mm
Square



Single Pin Hitch

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
300	11.5M	10.5M	9.6M
350	11.5M	10.5M	9.6M
400	11M	10M	9.1M
450	11M	10M	9.1M
500	10.5M	9.6M	8.7M
600	10M	9.1M	8.3M
750	9.2M	8.3M	7.5M
800	9.2M	8.3M	7.5M
900	8.7M	7.9M	7.1M
1000	8.2M	7.4M	6.7M
1200	7.7M	7M	6.3M
1500	7.2M	6.5M	5.9M
1800	6M	6.3M	4.9M



Double Pin
Cradle Hitch



2 Way Valve
Converts single
acting hammer
circuit into 2 Way
auxiliary flow



Adaptor Plate
for 42,000MAX



EXCAVATORS 21 - 45 T

PA SERIES AUGERS 300mm-2.4M Dia

Torque Range: 33,295-66,589 Nm
Oil Pressure Range: 160-320 Bar
Oil Flow Range: 100-280 lpm
Speed Range: 8-21 rpm
Unit Height: 1556mm
Unit Diameter: 406mm
Unit Weight: 480 kg
Output Shaft Std: 110mm Square
(Output Shaft adaptors available)

Case Drain Line: **Mandatory**



110mm
Square



Single Pin Hitch

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
300	12M	10.8M	9.7M
350	↓	↓	↓
400	12M	10.8M	9.7M
450	11.5M	10.4M	9.4M
500	11.5M	10.4M	9.4M
600	11M	9.9M	8.9M
750	10M	9M	8.1M
800	10M	9M	8.1M
900	9.5M	8.6M	7.7M
1000	9M	8.1M	7.3M
1200	8.3M	7.5M	6.8M
1500	7.5M	6.8M	6.1M
1800	6.5M	5.9M	5.3M
2000	5.8M	5.2M	4.7M
2200	5.3M	4.8M	4.3M
2400	4.8M	4.3M	3.9M



Double Pin
Cradle Hitch



2 Way Valve
Converts single
acting hammer
circuit into 2 Way
auxiliary flow



Adaptor Plate
for 65,000MAX



AUGER SUMMARY

Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.


PA AUGERS

Auger Torque PA Augers feature extra long flighted sections of shallow pitch flights and are available in 2.3M and 3.3M lengths. **Earth, Rock** and **TCH** variations are available.

Available as standard in the following diameters:

300mm	450mm	600mm	800mm	1.2M	2M
350mm	500mm	700mm	900mm	1.5M	2.2M
400mm	550mm	750mm	1M	1.8M	2.4M

For Augers over 1.5 metres diameter please call our sales office for further information.

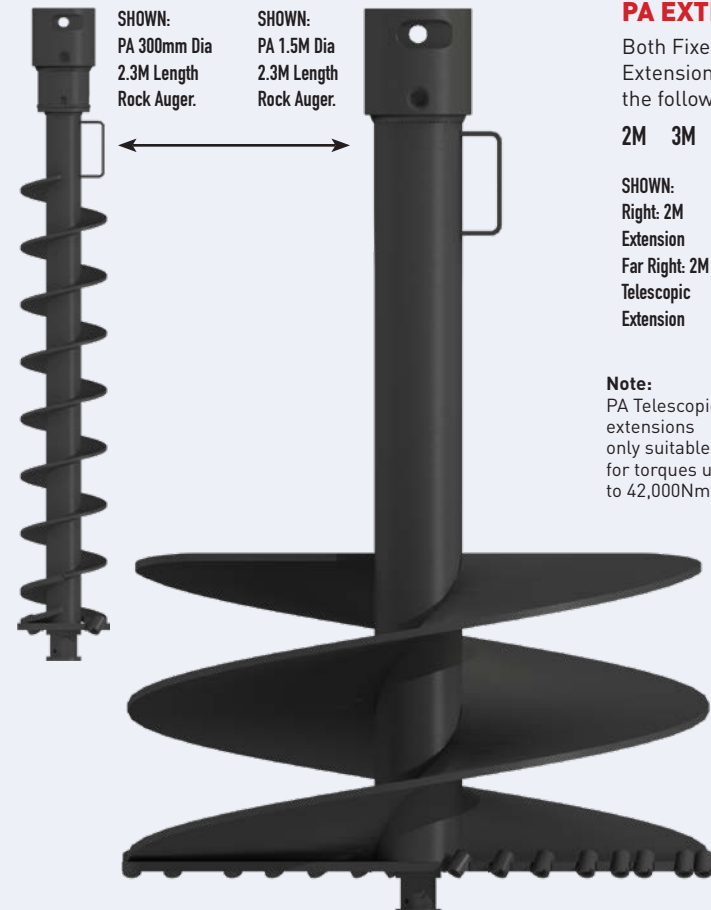

PA EXTENSIONS

Both Fixed and Telescopic Extensions are available in the following lengths:

2M 3M

Shown:
Right: 2M Extension
Far Right: 2M Telescopic Extension

Note:
PA Telescopic extensions only suitable for torques up to 42,000Nm.


ML1500
 Earth Drill

MINI LOADERS
S4 AUGERS
100mm-400mm Dia

 Torque Range: 511-1,496 Nm
 Oil Pressure Range: 70-205 Bar

 Oil Flow Range: 20-45 lpm
 Speed Range: 44-98 rpm

 Unit Height: 406 mm
 Unit Width: 205 mm
 Unit Weight: 38 kg

 Mounting Frame: 2 Way Swing
 4 Way Swing

 Output Shaft Std: 65mm Round
 (Output Shaft adaptors available)


4 Way Swing Frame

65mm
Round

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	2M	1.8M	1.6M
150	2M	1.8M	1.6M
200	1.8M	1.6M	1.4M
225	1.8M	1.6M	1.4M
250	1.5M	1.4M	1.3M
300	1.5M	1.4M	1.3M
350	1.5M	1.4M	1.3M
400	1.2M	1.1M	1M


ML2000
 Earth Drill

MINI LOADERS
S4 AUGERS
100mm-450mm Dia

 Torque Range: 639-2,190 Nm
 Oil Pressure Range: 70-240 Bar

 Oil Flow Range: 25-57 lpm
 Speed Range: 43-99 rpm

 Unit Height: 465 mm
 Unit Width: 205 mm
 Unit Weight: 40 kg

 Mounting Frame: 2 Way Swing
 4 Way Swing

 Output Shaft Std: 65mm Round
 (Output Shaft adaptors available)


4 Way Swing Frame

65mm
Round

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	2.2M	2M	1.8M
150			
200			
225			
250	↓	↓	↓
300	2.2M	2M	1.8M
350	2M	1.8M	1.6M
400	1.5M	1.4M	1.3M
450	1.2M	1.1M	1M


ML2500
 Earth Drill

MINI LOADERS
S4 AUGERS
100mm-500mm Dia

 Torque Range: 830-2,847 Nm
 Oil Pressure Range: 70-240 Bar

 Oil Flow Range: 27-65 lpm
 Speed Range: 36-87 rpm

 Unit Height: 465 mm
 Unit Width: 205 mm
 Unit Weight: 40 kg

 Mounting Frame: 2 Way Swing
 4 Way Swing

 Output Shaft Std: 65mm Round
 (Output Shaft adaptors available)


4 Way Swing Frame

65mm
Round

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	2.5M	2.3M	2.1M
150			
200			
225			
250	↓	↓	↓
300	2.5M	2.3M	2.1M
350	2.3M	2.1M	1.9M
400	1.9M	1.7M	1.5M
450	1.7M	1.5M	1.4M
500	1.5M	1.4M	1.3M


3000
 Earth Drill


SKIDSTEER LOADERS
LOW FLOW
UP TO 50 HP
S4 AUGERS
100-600mm Dia

 Torque Range: 959-2,877 Nm
 Oil Pressure Range: 80-240 Bar

 Oil Flow Range: 27-75 lpm
 Speed Range: 36-100 rpm

 Unit Height: 665mm
 Unit Diameter: 244mm
 Unit Weight: 71 kg

 Mounting Frame: Fixed Centre Cradle
 Side Shift Cradle

 Output Shaft Std: 65mm Round
 (Output Shaft adaptors available)


Side Shift Frame

65mm
Round


AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	3M	2.7M	2.4M
150			
200			
225			
250			
300			
350	↓	↓	↓
400	3M	2.7M	2.4M
450	2.6M	2.3M	2.1M
500	2.3M	2.1M	1.9M
600	1.8M	1.6M	1.4M



SKIDSTEER LOADERS LOW FLOW UP TO 65 HP

S4 AUGERS 100mm-750mm Dia

Torque Range: 1,205-3,614 Nm
Oil Pressure Range: 80-240 Bar
Oil Flow Range: 40-85 lpm
Speed Range: 42-90 rpm
Unit Height: 665mm
Unit Diameter: 244mm
Unit Weight: 73 kg
Mounting Frame: Fixed Centre Cradle
Side Shift Cradle
Output Shaft Std: 65mm Round
(Output Shaft adaptors available)



Side Shift Frame



65mm
Round

GUIDE TO DRILLING PERFORMANCE*


AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	2.7M	2.7M	2.4M
150			
200			
225			
250			
300			
350			
400			
450			
500	2.7M	2.7M	2.4M
600	2.6M	2.6M	2.3M
750	1.6M	1.6M	1.4M



SKIDSTEER LOADERS LOW FLOW UP TO 80 HP

S4 AUGERS 100mm-900mm Dia

Torque Range: 1,574-4,721 Nm
Oil Pressure Range: 80-240 Bar
Oil Flow Range: 50-95 lpm
Speed Range: 40-77 rpm
Unit Height: 665mm
Unit Diameter: 244mm
Unit Weight: 75 kg
Mounting Frame: Fixed Centre Cradle
Side Shift Cradle
Output Shaft Std: 65mm Round
(Output Shaft adaptors available)



Side Shift Frame



65mm
Round

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	4M	3.6M	3.2M
150			
200			
225			
250			
300			
350			
400			
450			
500			
600	4M	3.6M	3.2M
750	2.5M	2.3M	2.1M
800	2M	1.8M	1.6M
900	1.5M	1.4M	1.3M

AUGER SUMMARY

Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.

S4 AUGERS

Auger Torque S4 Augers feature extra long flighted sections of shallow pitch flights. **Earth, Tungsten, Rock, Hard Rock** and **Extra Dig** variations are available.

Available as standard in the following diameters:

100mm	300mm	600mm
150mm	375mm	750mm
200mm	400mm	800mm
225mm	450mm	900mm
250mm	500mm	


S4 EXTENSIONS

S4 Auger Extensions are available in the following lengths:

500mm
1M
(other lengths on request)



SHOWN:
S4 100mm Dia,
1.2M Length**
Shock Lock™

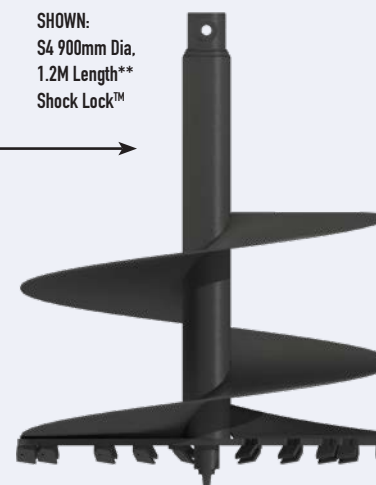


SHOWN:
S4 900mm Dia,
1.2M Length**
Shock Lock™

SHOWN:
S4 1M
Extension



SHOCK LOCK™
Tooth Locking System

DON'T LEAVE YOUR TEETH
DOWN THE HOLE!



** Auger lengths stated
include fitted wear parts.



**SKIDSTEER LOADERS
HIGH FLOW
UP TO 100 HP**

**TELEHANDLERS
4.5 - 7 T**

**S5 AUGERS
150mm-900mm Dia**


Torque Range: 1,685-5,477 Nm
Oil Pressure Range: 80-260 Bar

Oil Flow Range: 40-115 lpm
Speed Range: 30-87 rpm

Unit Height: 780mm
Unit Diameter: 269mm
Unit Weight: 108 kg

Mounting Frame: Fixed Centre Cradle
Side Shift Cradle

Output Shaft Std: 75mm Square
(Output Shaft adaptors available)



GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	4M	3.6M	3.2M
200			
225			
250			
300			
350			
400			
450			
500	↓	↓	↓
600	4M	3.6M	3.2M
750	3M	2.7M	2.4M
800	2.5M	2.3M	2.1M
900	2M	1.8M	1.8M



75mm Square



**SKIDSTEER LOADERS
HIGH FLOW
UP TO 135 LPM**

**TELEHANDLERS
5 - 8 T**

**S5 AUGERS
150mm-900mm Dia**


Torque Range: 2,133-6,931 Nm
Oil Pressure Range: 80-260 Bar

Oil Flow Range: 60-135 lpm
Speed Range: 36-81 rpm

Unit Height: 780mm
Unit Diameter: 269mm
Unit Weight: 112 kg

Mounting Frame: Fixed Centre Cradle
Side Shift Cradle

Output Shaft Std: 75mm Square
(Output Shaft adaptors available)



GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	5M	4.5M	4.1M
200			
225			
250			
300			
350			
400			
450	↓	↓	↓
500	5M	4.5M	4.1M
600	4.3M	4M	3.7M
750	3.5M	3.2M	2.9M
800	3M	2.7M	2.4M
900	2.5M	2.3M	2.1M



75mm Square



Bolt On Pressure Relief Valve



**SKIDSTEER LOADERS
HIGH FLOW
UP TO 150 LPM**

**S5 AUGERS
150mm-1.2M Dia**


Torque Range: 2,717-8,152 Nm
Oil Pressure Range: 80-240 Bar

Oil Flow Range: 70-150 lpm
Speed Range: 33-70 rpm

Unit Height: 780mm
Unit Diameter: 269mm
Unit Weight: 116 kg

Mounting Frame: Fixed Centre Cradle
Side Shift Cradle

Output Shaft Std: 75mm Square
(Output Shaft adaptors available)



GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	6M	5.4M	4.9M
200			
225			
250			
300			
350	↓	↓	↓
400	6M	5.4M	4.9M
450	5M	4.5M	4.1M
500	5M	4.5M	4.1M
600	5M	4.5M	4.1M
750	4M	3.6M	3.2M
800	4M	3.6M	3.2M
900	3.5M	3.2M	2.9M
1000	3.5M	2.9M	2.9M
1200	3M	2.7M	2.4M



75mm Square



Bolt On Pressure Relief Valve



AUGER SUMMARY

Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.

S5 AUGERS

Auger Torque S5 Augers feature extra long flighted sections of shallow pitch flights. **Earth, Tungsten, Rock, Hard Rock** and **Extra Dig** variations are available.

Available as standard in the following diameters:

150mm	350mm	750mm
200mm	400mm	800mm
225mm	450mm	900mm
250mm	500mm	1M
300mm	600mm	1.2M

S5 EXTENSIONS

Available in the following lengths:

1M	1.5M
2M	


S5 TELESCOPIC

Available in the following lengths:

1.5M	2M
------	----



SHOWN:
S5 150mm Dia,
1.5M Length
Shock Lock™
Rock Augers are
also available.

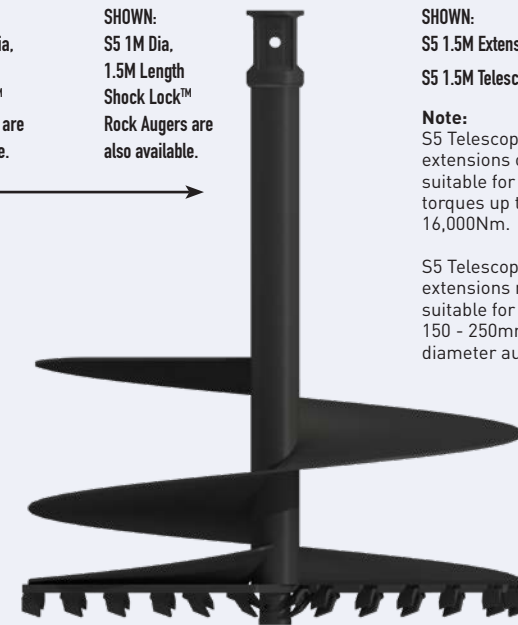


SHOWN:
S5 1M Dia,
1.5M Length
Shock Lock™
Rock Augers are
also available.

SHOWN:
S5 1.5M Extension
S5 1.5M Telescopic

Note:
S5 Telescopic
extensions only
suitable for
torques up to
16,000Nm.

S5 Telescopic
extensions not
suitable for
150 - 250mm
diameter augers.

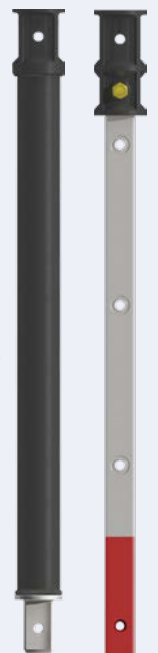

SHOCK LOCK™
Tooth Locking System

DON'T LEAVE YOUR TEETH
DOWN THE HOLE!



Augers shown feature
Shock Lock™ Toothholders.
Rock Teeth Augers are also
available.



BACKHOES

S5 AUGERS 150mm-900mm Dia

Torque Range: 2,133-6,931 Nm
Oil Pressure Range: 80-260 Bar
Oil Flow Range: 60-135 lpm
Speed Range: 36-81 rpm
Unit Height: 780mm
Unit Diameter: 269mm
Unit Weight: 112 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Optional Extras: 2 Way Valve
Output Shaft Std: 75mm Square
(Output Shaft adaptors available)



Double Pin Hitch



Double Pin
Cradle Hitch



75mm
Square



2 Way Valve
Converts single
acting hammer
circuit into 2 Way
auxiliary flow

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	5M	4.5M	4.1M
200			
225			
250			
300			
350			
400			
450			
500	5M	4.5M	4.1M
600	4.3M	4M	3.7M
750	3.5M	3.2M	2.9M
800	3M	2.7M	2.4M
900	2.5M	2.3M	2.1M



BACKHOES

S5 AUGERS 150mm-1.2M Dia

Torque Range: 2,717-8,152 Nm
Oil Pressure Range: 80-240 Bar
Oil Flow Range: 70-150 lpm
Speed Range: 33-70 rpm
Unit Height: 780mm
Unit Diameter: 269mm
Unit Weight: 116 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Optional Extras: 2 Way Valve
Output Shaft Std: 75mm Square
(Output Shaft adaptors available)



Double Pin Hitch



Double Pin
Cradle Hitch



75mm
Square



2 Way Valve
Converts single
acting hammer
circuit into 2 Way
auxiliary flow

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	6M	5.4M	4.9M
200			
225			
250			
300			
350			
400	6M	5.4M	4.9M
450	5M	4.5M	4.1M
500	5M	4.5M	4.1M
600	5M	4.5M	4.1M
750	4M	3.6M	3.2M
800	4M	3.6M	3.2M
900	3.5M	3.2M	2.9M
1000	3.5M	2.9M	2.9M
1200	3M	2.7M	2.4M



BACKHOES

S6 AUGERS 150mm-1.2M Dia

Torque Range: 3,281-10,662 Nm
Oil Pressure Range: 80-260 Bar
Oil Flow Range: 70-150 lpm
Speed Range: 27-58 rpm
Unit Height: 883mm
Unit Diameter: 290mm
Unit Weight: 162 kg

Hitch Options: Single Pin Hitch
Double Pin Hitch
Cradle Hitch

Optional Extras: 2 Way Valve
Output Shaft: 75mm Square
Case Drain Line: Recommended



Double Pin Hitch



Double Pin
Cradle Hitch



75mm
Square



2 Way Valve
Converts single
acting hammer
circuit into 2 Way
auxiliary flow

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	6.5M	5.9M	5.3M
200			
225			
250			
300			
350			
400	6.5M	5.9M	5.3M
450	6M	5.4M	4.9M
500	6M	5.4M	4.9M
600	6M	5.4M	4.9M
750	5M	4.5M	4.1M
800	5M	4.5M	4.1M
900	4M	3.6M	3.2M
1000	3.7M	3.3M	3.2M
1200	3.4M	3M	2.7M



AUGER SUMMARY

Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.

S5 AUGERS

Auger Torque S5 Augers feature extra long flighted sections of shallow pitch flights. **Earth, Tungsten, Rock, Hard Rock** and **Extra Dig** variations are available.

Available as standard in the following diameters:

150mm	350mm	750mm
200mm	400mm	800mm
225mm	450mm	900mm
250mm	500mm	1M
300mm	600mm	1.2M

S5 EXTENSIONS


Available in the following lengths:

1M 1.5M
2M

S5 TELESCOPIC

Available in the following lengths:

1.5M 2M

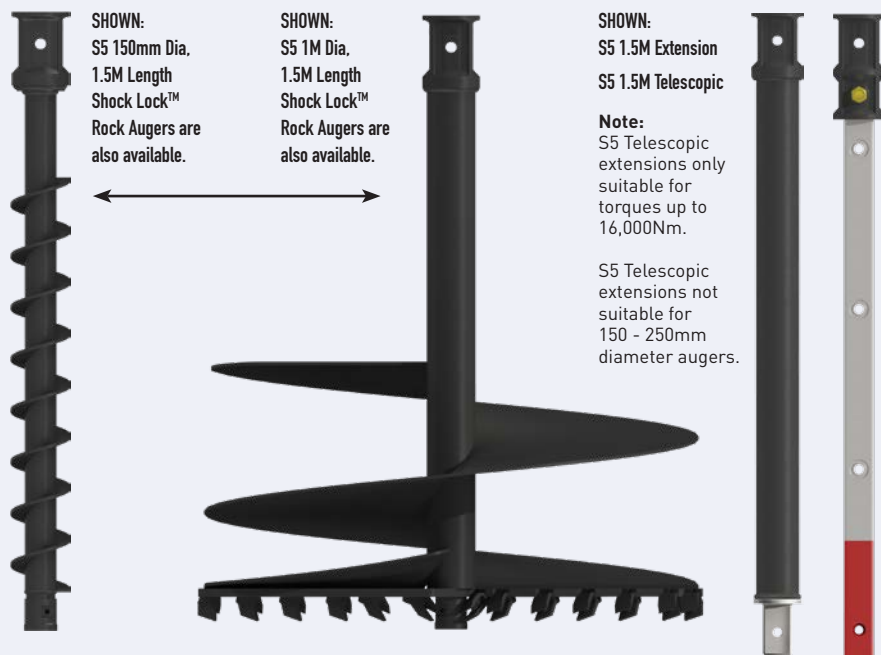

SHOWN:
S5 150mm Dia,
1.5M Length
Shock Lock™
Rock Augers are
also available.

SHOWN:
S5 1M Dia,
1.5M Length
Shock Lock™
Rock Augers are
also available.


SHOWN:
S5 1.5M Extension
S5 1.5M Telescopic

Note:
S5 Telescopic
extensions only
suitable for
torques up to
16,000Nm.

S5 Telescopic
extensions not
suitable for
150 - 250mm
diameter augers.

SHOCK LOCK™
Tooth Locking System

DON'T LEAVE YOUR TEETH
DOWN THE HOLE!



Augers shown feature
Shock Lock™ Toothholders.
Rock Teeth Augers are also
available.

AUGER SUMMARY

Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.

S6 AUGERS

Auger Torque S6 Augers feature extra long flighted sections of shallow pitch flights. **Earth, Tungsten, Rock** and **TCH** variations are available.

Available as standard in the following diameters:

150mm	300mm	500mm	900mm
200mm	350mm	600mm	1M
225mm	400mm	750mm	1.2M
250mm	450mm	800mm	

S6 EXTENSIONS


Available in the following lengths:

1.5M 2M 2.5M 3M

S6 TELESCOPIC

Available in the following lengths:

1.5M 2M

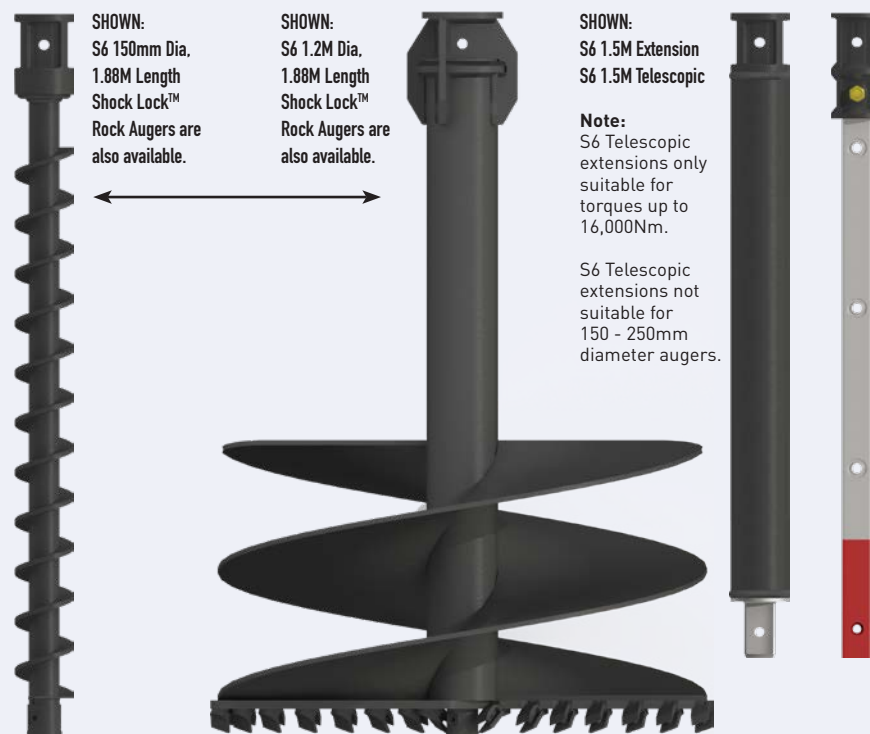

SHOWN:
S6 150mm Dia,
1.88M Length
Shock Lock™
Rock Augers are
also available.

SHOWN:
S6 1.2M Dia,
1.88M Length
Shock Lock™
Rock Augers are
also available.

SHOWN:
S6 1.5M Extension
S6 1.5M Telescopic

Note:
S6 Telescopic
extensions only
suitable for
torques up to
16,000Nm.

S6 Telescopic
extensions not
suitable for
150 - 250mm
diameter augers.

SHOCK LOCK™
Tooth Locking System

DON'T LEAVE YOUR TEETH
DOWN THE HOLE!



Augers shown feature
Shock Lock™ Toothholders.
Rock Teeth Augers are also
available.



3000TC
Earth Drill

TRUCK CRANES TO 9 T / METRE

S4 AUGERS
100mm-600mm Dia

Torque Range: 959-3,116 Nm
Oil Pressure Range: 80-260 Bar
Oil Flow Range: 5-35 lpm
Speed Range: 7-46 rpm
Unit Height: 665mm
Unit Diameter: 244mm
Unit Weight: 73 kg
Hitch: Single Pin
Output Shaft Std: 65mm Round
(Output Shaft adaptors available)



65mm
Round



Single Pin
Hitch



Linkage
Block

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
100	3M	2.7M	2.4M
150			
200			
225			
250			
300			
350			
400	3M	2.7M	2.4M
450	2.6M	2.3M	2.1M
500	2.3M	2.1M	1.9M
600	1.8M	1.6M	1.4M



5500TC
Earth Drill

TRUCK CRANES TO 15 T / METRE

S5 AUGERS
150mm-900mm Dia

Torque Range: 1,685-5,477 Nm
Oil Pressure Range: 80-260 Bar
Oil Flow Range: 15-50 lpm
Speed Range: 11-38 rpm
Unit Height: 780 mm
Unit Diameter: 269 mm
Unit Weight: 108 kg
Hitch: Rope Wind Hitch
Single Pin
Output Shaft Std: 75mm Square
(Output Shaft adaptors available)



Rope Wind Hitch



75mm
Square



Single Pin
Hitch



Linkage
Block

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	4M	3.6M	3.2M
200			
225			
250			
300			
350			
400			
450			
500			
600	4M	3.6M	3.2M
750	3M	2.7M	2.4M
800	2.5M	2.3M	2.1M
900	2M	1.8M	1.8M



7000TC
Earth Drill

TRUCK CRANES 9-18 T / METRE

S5 AUGERS
150mm-900mm Dia

Torque Range: 2,098-6,819 Nm
Oil Pressure Range: 80-260 Bar
Oil Flow Range: 15-50 lpm
Speed Range: 9-30 rpm
Unit Height: 780 mm
Unit Diameter: 269 mm
Unit Weight: 110 kg
Hitch: Rope Wind Hitch
Single Pin
Output Shaft Std: 75mm Square
(Output Shaft adaptors available)



Rope Wind Hitch



75mm
Square



Single Pin
Hitch



Linkage
Block

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
150	5M	4.5M	4.1M
200			
225			
250			
300			
350			
400			
450			
500	5M	4.5M	4.1M
600	4.3M	4M	3.7M
750	3.5M	3.2M	2.9M
800	3M	2.7M	2.4M
900	2.5M	2.3M	2.1M



AUGER SUMMARY

Full technical details of Augers, Extensions and Wear Parts can be found in the Auger section of this brochure.

S4 AUGERS FOR THE 3000TC

Auger Torque S4 Augers feature extra long flighted sections of shallow pitch flights. **Earth, Tungsten, Rock, Hard Rock** and **Extra Dig** variations are available.


Available as standard in the following diameters:

100mm	250mm	450mm	800mm
150mm	300mm	500mm	900mm
200mm	350mm	600mm	
225mm	400mm	750mm	

S4 EXTENSIONS


S4 Auger Extensions are available in the following lengths:

500mm
1M
(other lengths on request)

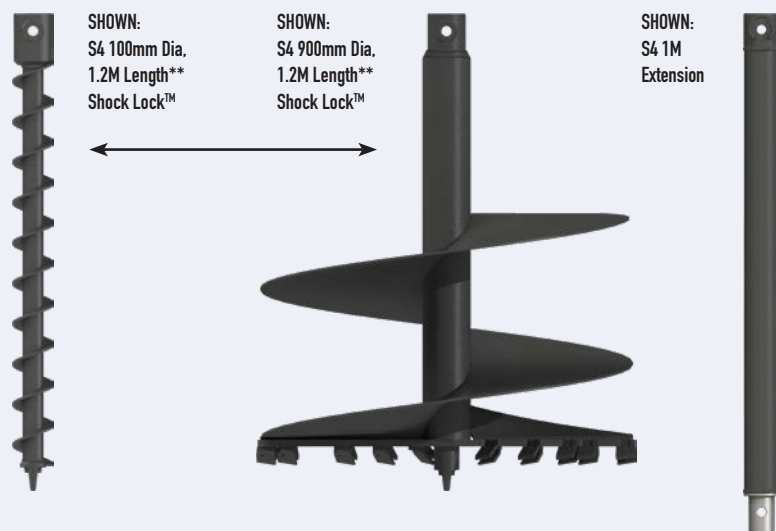

SHOCK LOCK™
Tooth Locking System

DON'T LEAVE YOUR TEETH
DOWN THE HOLE!



** Auger lengths stated
include fitted wear parts.

S5 AUGERS FOR THE 5500TC AND 7000TC

Auger Torque S5 Augers feature extra long flighted sections of shallow pitch flights. **Earth, Tungsten, Rock, Hard Rock** and **Extra Dig** variations are available.

Available as standard in the following diameters:

150mm	350mm	750mm
200mm	400mm	800mm
225mm	450mm	900mm
250mm	500mm	1M
300mm	600mm	

S5 EXTENSIONS


Available in the
following lengths:

1M 1.5M
2M

S5 TELESCOPIC

Available in the
following lengths:

1.5M 2M

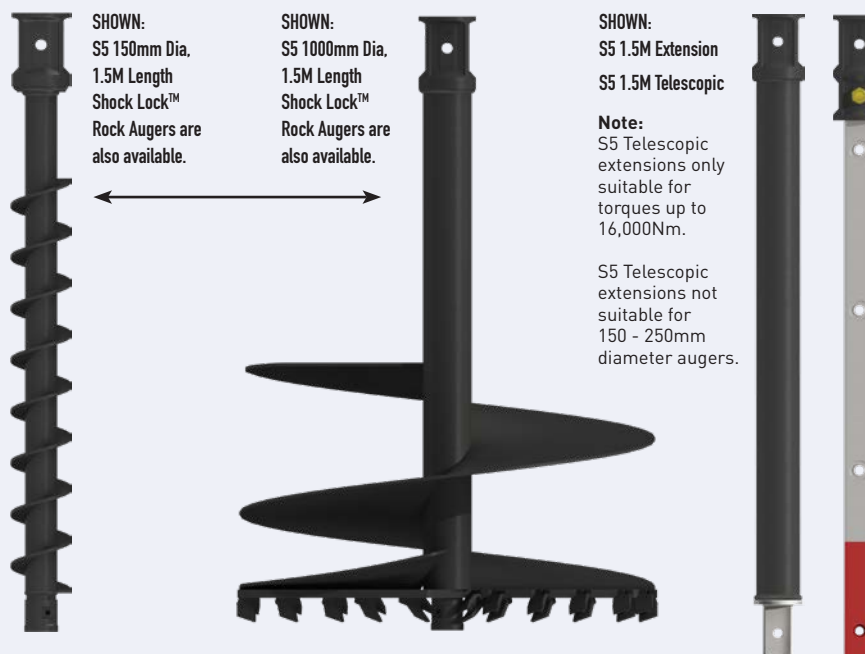


Note:
S5 Telescopic
extensions only
suitable for
torques up to
16,000Nm.

S5 Telescopic
extensions not
suitable for
150 - 250mm
diameter augers.

SHOCK LOCK™
Tooth Locking System

DON'T LEAVE YOUR TEETH
DOWN THE HOLE!




Augers shown feature
Shock Lock™ Toothholders.
Rock Teeth Augers are also
available.

Truck Cranes & The Rope Wind Hitch

Growing in popularity, truck cranes allow a great deal of flexibility when working off site. On-board hydraulics allow trucks to deliver materials where no loading facilities are available.

Equally, remote working can be made easy by using the truck crane boom for earth drilling operations. Flat bed trucks equipped with Truck Crane Earth Drills turn telegraph and power pole as well as street light installations into a single man operation and foundation piling can all be facilitated with the use of one vehicle.

The ingenious Auger Torque Rope Wind Hitch allows for safe and secure storage during transit without the need to disassemble the unit from the boom.

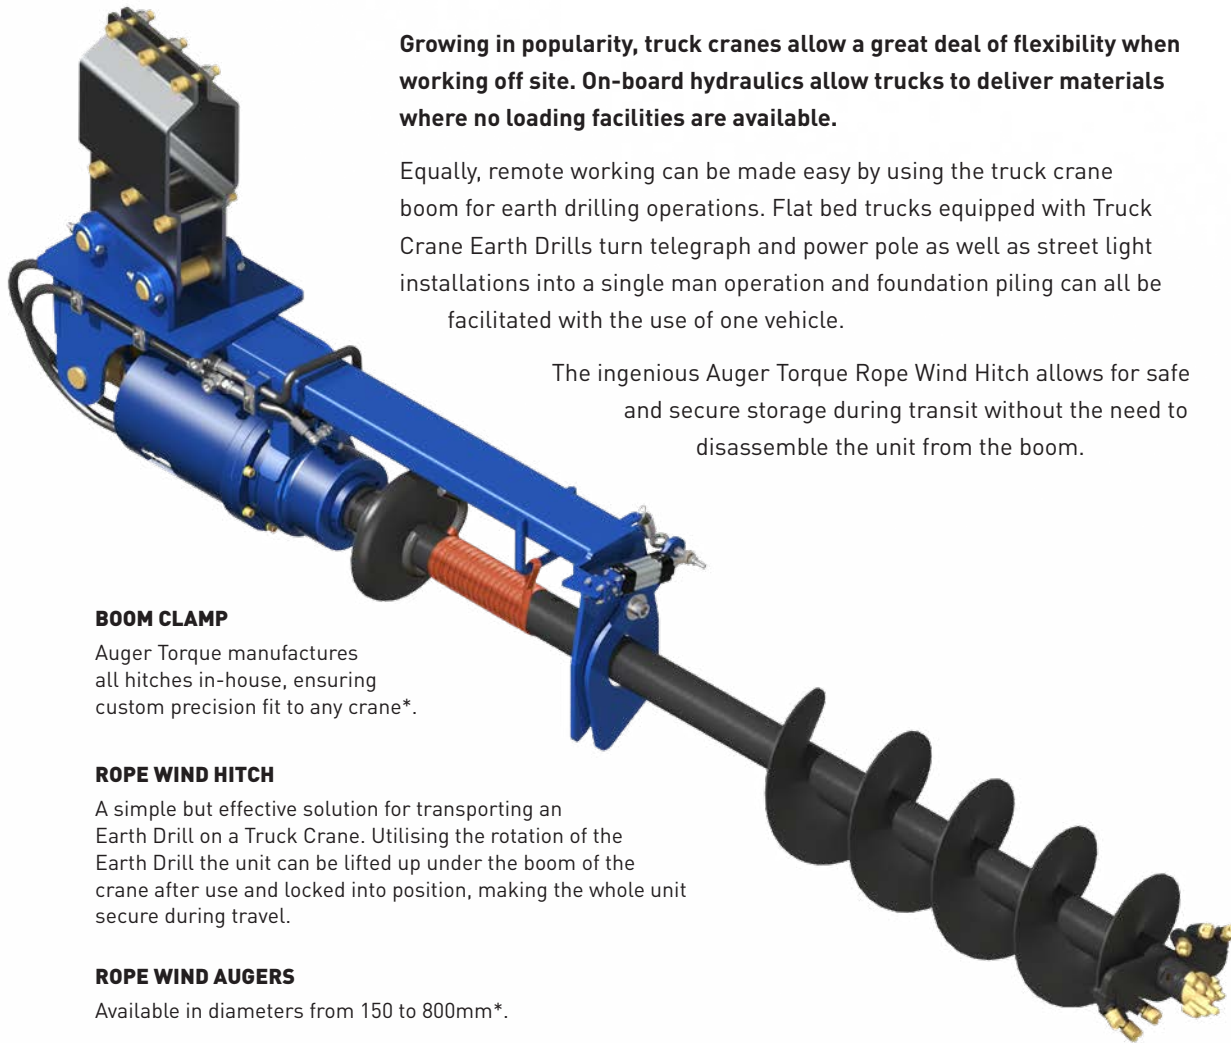

BOOM CLAMP

Auger Torque manufactures all hitches in-house, ensuring custom precision fit to any crane*.

ROPE WIND HITCH

A simple but effective solution for transporting an Earth Drill on a Truck Crane. Utilising the rotation of the Earth Drill the unit can be lifted up under the boom of the crane after use and locked into position, making the whole unit secure during travel.

ROPE WIND AUGERS

Available in diameters from 150 to 800mm*.

*Contact Auger Torque for further details.



PROVEN RELIABILITY IN EXTREMELY DEMANDING CONDITIONS



AUGERS

Features of our Augers

HUB OPTIONS

Augers are available with all major standard hubs on the market, including:

2", 2.5", 3" and 4" Hex

50mm, 2" and 65mm Round

57mm, 75mm, 100mm, 110mm and 130mm Square ...to name but a few.

HEAVY DUTY TUBE

We know that our Augers can expect a tough life so we only use the highest grade steel and vary our tube size according to machine size and application. Our Augers have a reputation of being the toughest on the market.

SHALLOW PITCH FLIGHTS

By working with and, more importantly, listening to operators feedback we have developed the perfect pitch for our flights. It will cut at its maximum efficiency and, most importantly the spoil will stay on your Auger when you remove it from the hole.

SHOCK LOCK™ Tooth Locking System





Are you tired of losing your teeth down the hole? With our Original **Shock Lock™** Tooth Locking System loss is now a thing of the past. The simple but effective locking pin holds teeth secure in both directions.

CONSTANT SPIRAL CUT

Our boring heads are designed with a Constant Spiral Cut. Teeth are located so that each makes its own fresh cut on every revolution and are angled to direct spoil towards the centre of the auger. The tooth cutting angle ensures spoil is broken up thoroughly to avoid any clogging.

PILOT AND TOOTH OPTIONS

Auger Torque Augers are offered with many different tooth and pilot options to suit your specific need. For example in the S4 range we offer up to five different combinations and we have the know-how to help you select the optimal configuration.

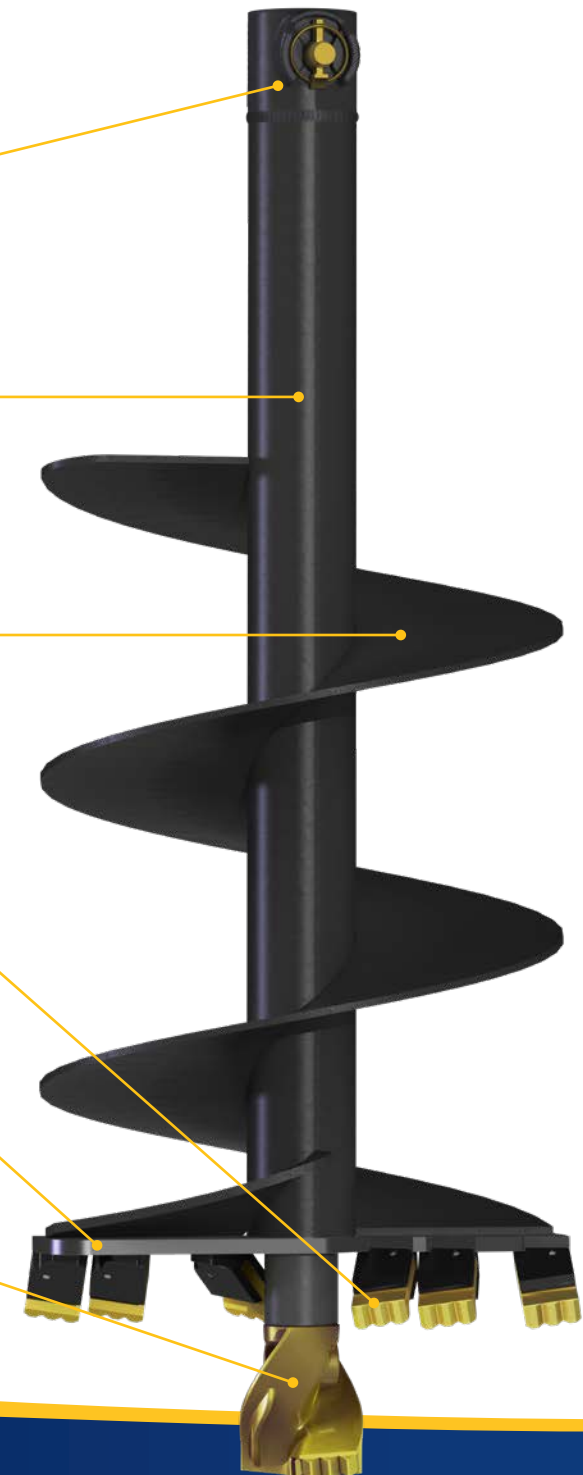


S2 AUGERS

MICRO EXCAVATORS 0.75 - 1 T

With our Original **Shock Lock™** Tooth Locking System tooth loss is now a thing of the past. Using the **Shock Lock™** pin and rubber in our unique **Shock Lock™** tooth holders ensures your Auger teeth are safely locked in place and protected against shock fractures.

Replacing worn teeth is a breeze with this system, simply knock out the old pin with a standard hole punch and the tooth will slide out of the holder with ease. Acclaimed as the best system on the market you will never need to worry about fitting spare teeth due to losing them again.

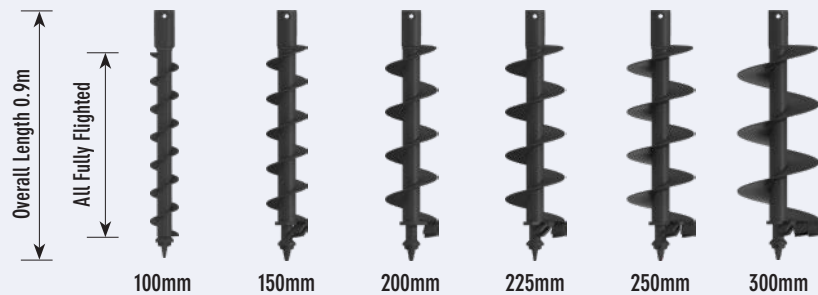

Earth Drill **1200**

HUB OPTIONS



EARTH WEAR PARTS



TUNGSTEN WEAR PARTS



EXTRAS



WEAR PARTS FOR GROUND CONDITIONS

EARTH (Shock Lock™)

Best suited to soft grounds like earth and clay.

TUNGSTEN (Shock Lock™)

Best used in dry, hard or medium ground conditions where floating rocks may be encountered. The perfect all-rounder if you are not sure about what you might encounter.



S4 AUGERS

MINI EXCAVATORS 1 - 5 T, MINI LOADERS,
SKIDSTEER LOADERS UP TO 80HP AND
TRUCK CRANES UP TO 9 T / METRE


STANDARD HUB OPTION



65mm
Round


SHOCK LOCK™ Tooth Locking System

DON'T LEAVE
YOUR TEETH
DOWN THE
HOLE!



With our Original **Shock Lock™** Tooth Locking System tooth loss is now a thing of the past. Using the **Shock Lock™** pin and rubber insert in our unique **Shock Lock™** tooth holders ensures your Auger teeth are safely locked in place and protected against shock fractures.

Replacing worn teeth is a breeze with this system, simply knock out the old pin with a standard hole punch and the tooth will slide out of the holder with ease. Acclaimed as the best system on the market you will never need to worry about fitting spare teeth due to loss again.

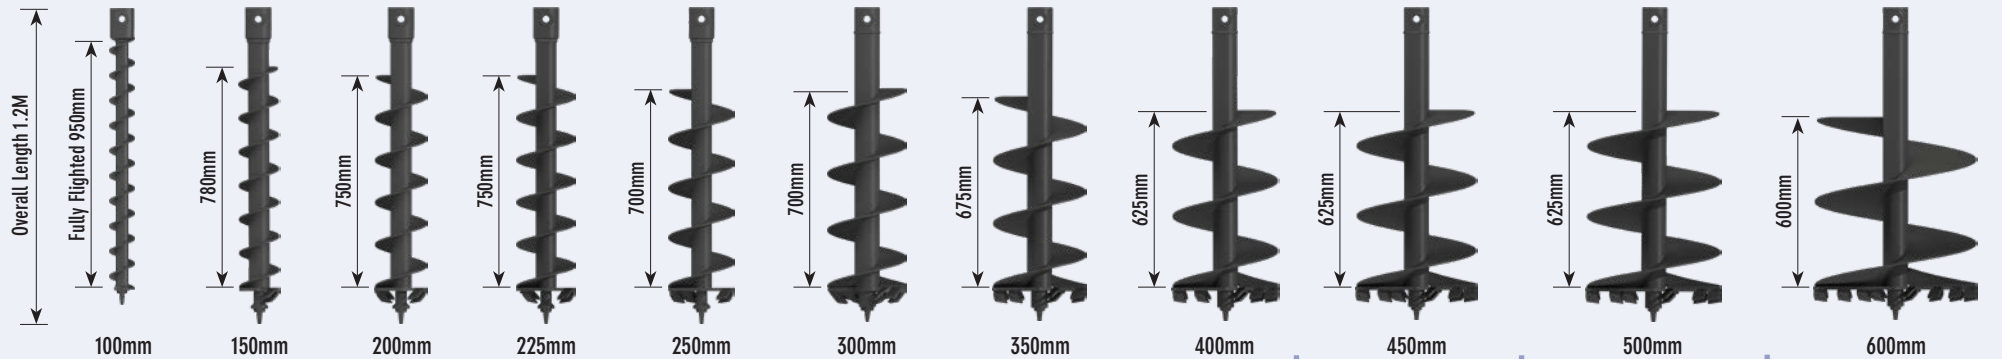

Earth Drill **X1500**
Earth Drill **ML1500**

Earth Drill **X2000**
Earth Drill **ML2000**

Earth Drill **X2500**
Earth Drill **ML2500**

Earth Drill **3000MAX**
Earth Drill **3000TC**

Earth Drill **3500MAX**

Earth Drill **4500MAX**

EARTH WEAR PARTS



S2/4
Earth Pilot
33-9203-KIT

S2/4 Shock Lock™
Earth Tooth
33-9121-KIT

TUNGSTEN WEAR PARTS



S4
Tungsten Pilot
33-9204-KIT

S4
Extra Dig Pilot
33-9212-KIT

S4 Shock Lock™
Tungsten Tooth
33-9122-KIT

ROCK WEAR PARTS



S4
Rock Pilot
33-9207-KIT

S4
Rock Tooth
33-9107

S4
Rotating Rock Pilot
33-9256-KIT

S4
Rotating Rock Tooth
33-9129

BORING HEADS




S4 Earth Teeth & Pilot

S4 Tungsten Teeth & Pilot


S4 Extra Dig Teeth & Pilot

S4 Rock Teeth & Pilot


S4 Flat Hard Rock Teeth & Pilot



750mm



800mm



900mm

All the Augers above are shown with
Shock Lock™ Tooth Holders.

* Overall Length given includes the
auger fitted with wear parts.

S4 EXTENSIONS



500mm

1M

EXTRAS



Pin & Clip
65 Round
30-0004-KIT

S1/2/4 Shock Lock™
Tooth Holder
33-1010

S4 Rock
Rotating Tooth Holder
33-4121

Support de Dent
Roche S4
33-1013



S4 Pilot
Extension
33-4106-KIT

S4 Drive Lugs
33-4102
33-4105
33-4110

WEAR PARTS REQUIRED FOR GROUND CONDITIONS

EARTH (Shock Lock™)

Best suited to soft grounds like earth and clay.

TUNGSTEN (Shock Lock™)

Best used in dry, hard or medium ground conditions where floating rocks may be encountered. The perfect all-rounder if you are not sure about what you might encounter.

ROCK (Taper Lock and Rotating)

For very hard ground and tarmac where extra cutting is needed and high wear is expected. Most effective on machines with high down pressure.

EXTRA DIG PILOT

A stronger Pilot for more demanding ground conditions.

OTHER
DIAMETERS
AVAILABLE ON
REQUEST

S5 AUGERS

EXCAVATORS FROM 4.5 - 8 T, TELEHANDLERS,
HIGH FLOW SKIDSTEER LOADERS, BACKHOES
AND TRUCK CRANES FROM 9 - 18 T / METRE


STANDARD HUB OPTION



75mm
Square


SHOCK LOCK™ Tooth Locking System

DON'T LEAVE
YOUR TEETH
DOWN THE
HOLE!



With our Original **Shock Lock™** Tooth Locking System tooth loss is now a thing of the past. Using the **Shock Lock™** pin and rubber insert in our unique **Shock Lock™** tooth holders ensures your Auger teeth are safely locked in place and protected against shock fractures.

Replacing worn teeth is a breeze with this system, simply knock out the old pin with a standard hole punch and the tooth will slide out of the holder with ease. Acclaimed as the best system on the market you will never need to worry about fitting spare teeth due to loss again.

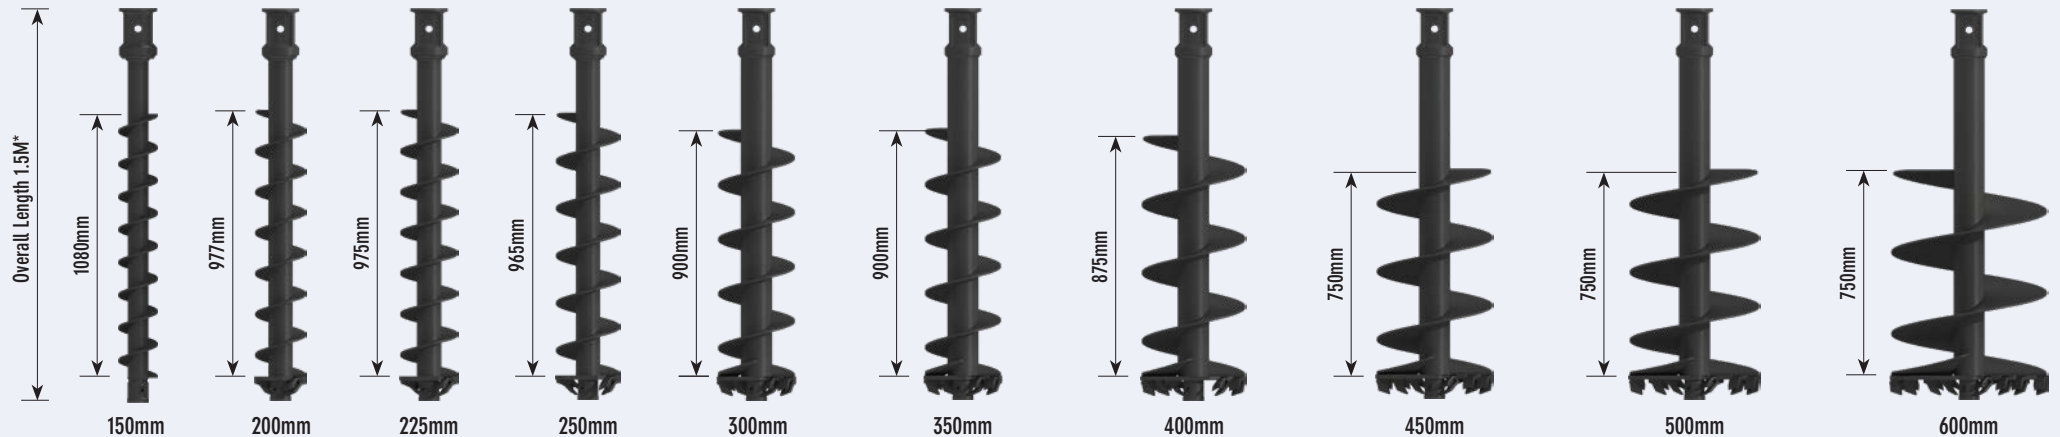

Earth Drill **5500MAX**

Earth Drill **5000TC**

Earth Drill **7000MAX**

Earth Drill **7000TC**

Earth Drill **8000MAX**

EARTH WEAR PARTS



S5/6 Earth Pilot
33-9205-KIT

S5/6 Shock Lock™ Earth Tooth
33-9126-KIT

TUNGSTEN WEAR PARTS



S5/6 Tungsten Pilot
33-9206-KIT

S5/6 Shock Lock™ Tungsten Tooth
33-9127-KIT

ROCK WEAR PARTS



S5/6 Rock Pilot
33-9207-KIT

S5/6 Rock Tooth
33-9107

S5/6 Rotating Rock Pilot
33-9256-KIT

S5/6 Rotating Rock Tooth
33-9129

EXTRAS



Pin & Clip
57/75 Square
30-0002-KIT

S5/6 Shock Lock™ Tooth Holder
33-1011

S5/6 Rock Tooth Holder
33-1013



S5/6 Drive Socket
1 3/4" Hex
33-4103

S5/6 Rock Rotating Tooth Holder
33-4121

BORING HEADS




S5/6 Earth Teeth & Pilot

S5/6 Tungsten Teeth & Pilot


S5/6 Rock Teeth & Pilot

S5/6 Flat Hard Rock Teeth & Pilot


S5/6 Tapered Rock Teeth & Pilot

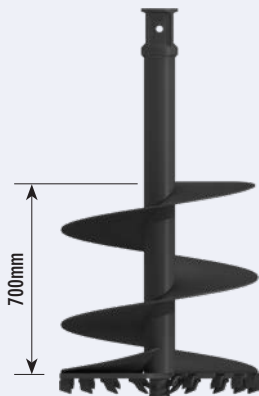


750mm

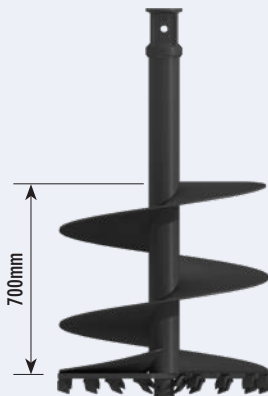


800mm

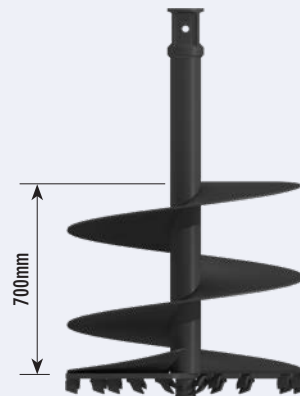

900mm

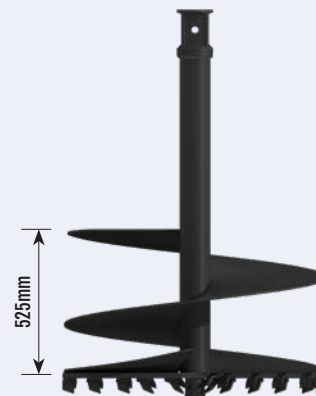

1M

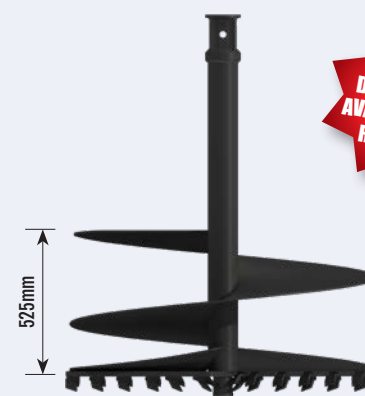


1.2M

All the Augers above are shown with **Shock Lock™** Tooth Holders. Rock Teeth require a Rock Tooth version of the Auger.


* Overall Length given includes the auger fitted with wear parts.

Augers over 1m - special order up to 1.2m

S5 EXTENSIONS

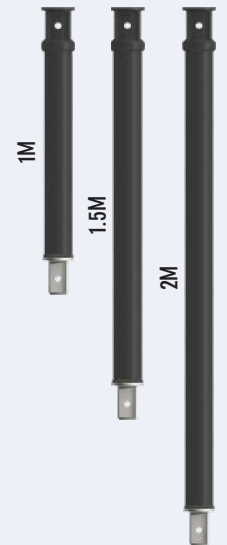

S5 TELESCOPIC

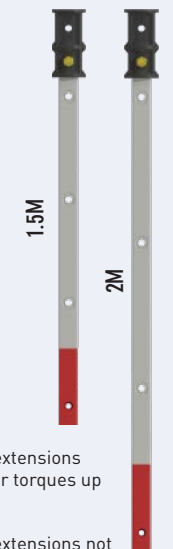

Note:
S5 Telescopic extensions only suitable for torques up to 16,000Nm.

S5 Telescopic extensions not suitable for 150 - 250mm diameter augers.

For Augers over 1 metre diameter please call our sales office for further information.

WEAR PARTS FOR GROUND CONDITIONS

EARTH (Shock Lock™)

Best suited to soft grounds like earth and clay.

TUNGSTEN (Shock Lock™)

Best used in dry, hard or medium ground conditions where floating rocks may be encountered. The perfect all-rounder if you are not sure about what you might encounter.

ROCK (Taper Lock and Rotating)

For very hard ground and tarmac where extra cutting is needed and high wear is expected. Most effective on machines with high down pressure.

S6 AUGERS

EXCAVATORS & BACKHOES FROM 8 - 22 T


STANDARD HUB OPTION



75mm
Square


SHOCK LOCK™ Tooth Locking System

**DON'T LEAVE
YOUR TEETH
DOWN THE
HOLE!**



With our Original **Shock Lock™** Tooth Locking System tooth loss is now a thing of the past. Using the **Shock Lock™** pin and rubber insert in our unique **Shock Lock™** tooth holders ensures your Auger teeth are safely locked in place and protected against shock fractures.

Replacing worn teeth is a breeze with this system, simply knock out the old pin with a standard hole punch and the tooth will slide out of the holder with ease. Acclaimed as the best system on the market you will never need to worry about fitting spare teeth due to loss again.

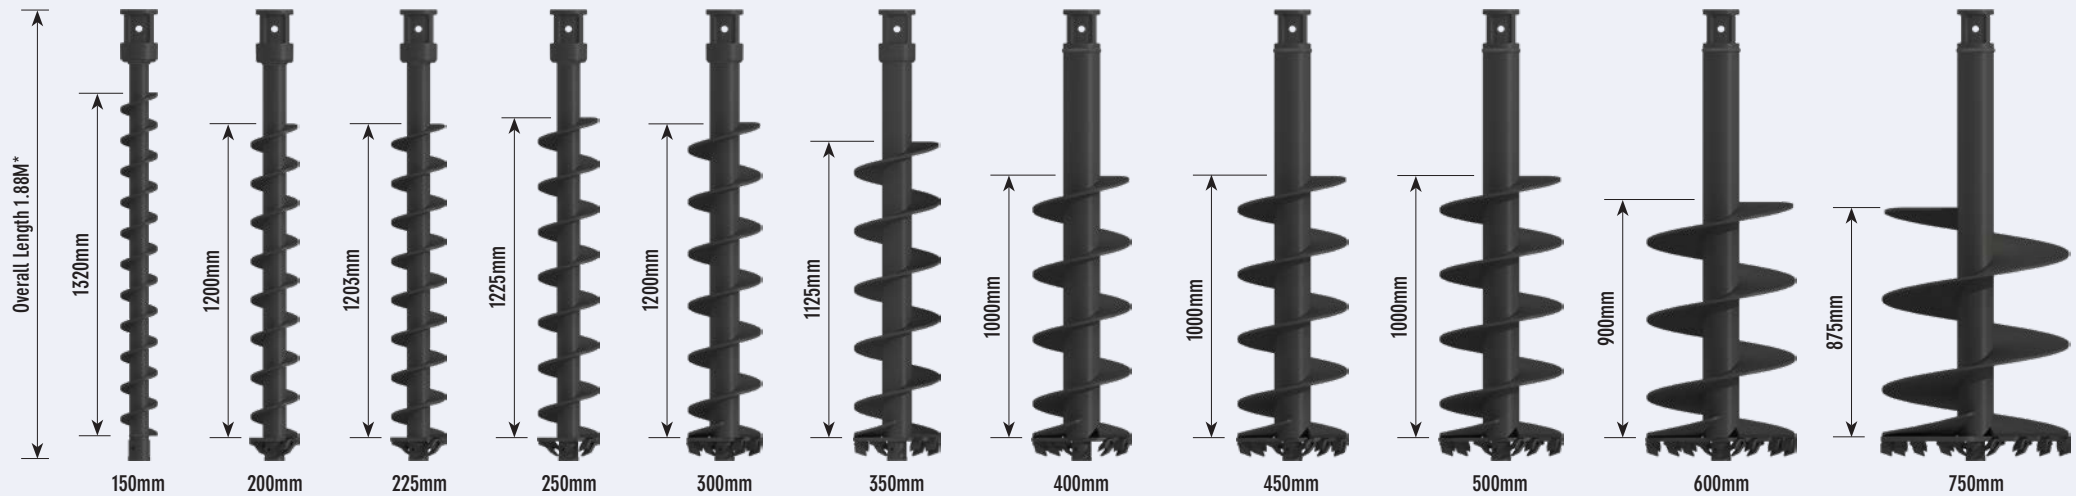

Earth Drill **10 000**

Earth Drill **12 000MAX**

Earth Drill **15 000MAX**

Earth Drill **20 000MAX**

Earth Drill **25 000MAX**

EARTH WEAR PARTS



S5/6 Earth Pilot
33-9205-KIT

S5/6 Shock Lock™ Earth Tooth
33-9126-KIT

TUNGSTEN WEAR PARTS



S5/6 Tungsten Pilot
33-9206-KIT

S5/6 Shock Lock™ Tungsten Tooth
33-9127-KIT

ROCK WEAR PARTS



S5/6 Rock Pilot
33-9207-KIT

S5/6 Rock Tooth
33-9107

S5/6 Rotating Rock Pilot
33-9256-KIT

S5/6 Rotating Rock Tooth
33-9129

BORING HEADS



S5/6 Earth Teeth & Pilot

S5/6 Tungsten Teeth & Pilot

S5/6 Rock Teeth & Pilot

S5/6 Tapered Rock Teeth & Pilot

EXTRAS




Pin & Clip
57/75 Square
30-0002-KIT

S5/6 Shock Lock™ Tooth Holder
33-101

S5/6 Rock Tooth Holder
33-1013

S5/6 Drive Socket
1 3/4" Hex
33-4103

S5/6 Rock Rotating Tooth Holder
33-4121

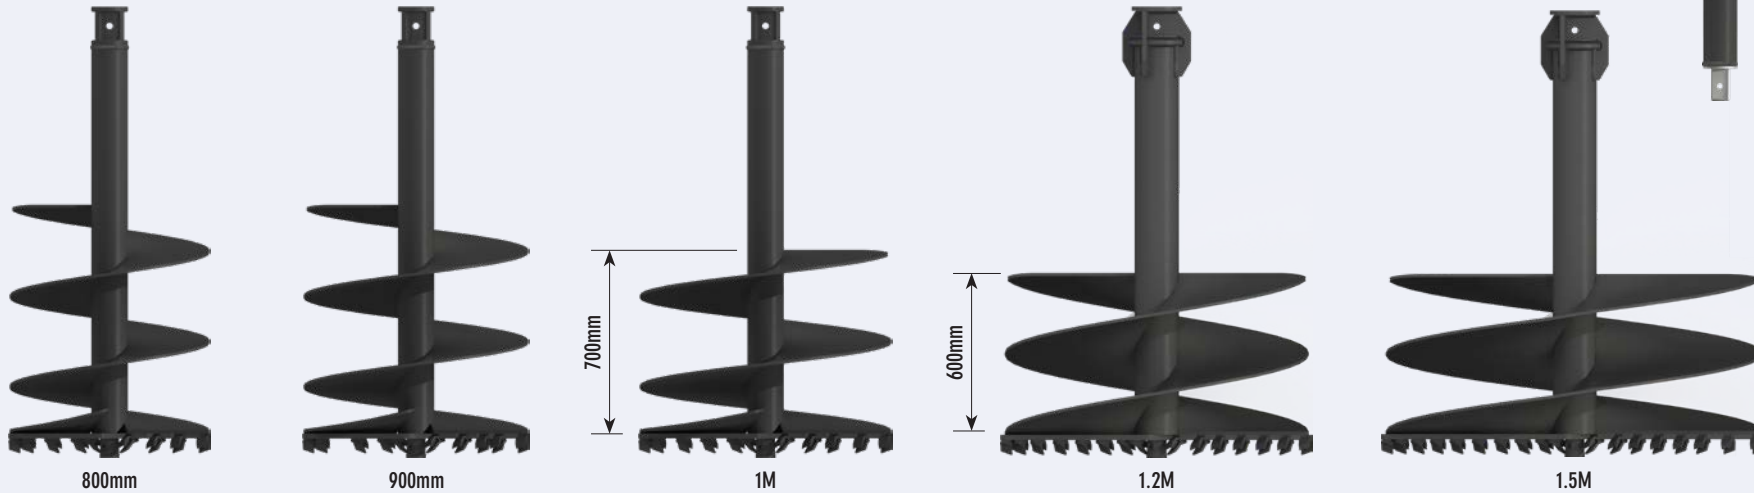


All the Augers above are shown with **Shock Lock™** Tooth Holders. Rock Teeth require a Rock Tooth version of the Auger.

* Overall Length given includes the auger fitted with wear parts.

Augers of a larger diameter and length can be manufactured for use with these Earth Drills, but technical advice is required. Call one of our main offices for more details.

S6 EXTENSIONS

S6 TELESCOPIC

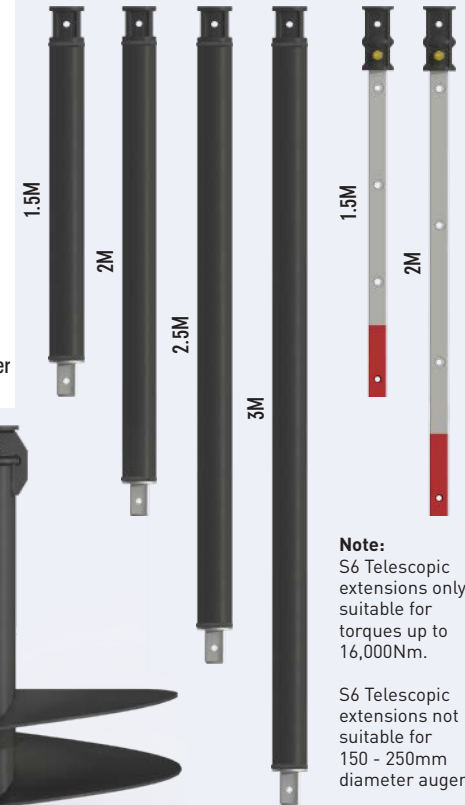

Note:
S6 Telescopic extensions only suitable for torques up to 16,000Nm.

S6 Telescopic extensions not suitable for 150 - 250mm diameter augers.

OTHER DIAMETERS AVAILABLE ON REQUEST

WEAR PARTS FOR GROUND CONDITIONS

EARTH (Shock Lock™)

Best suited to soft grounds like earth and clay.

TUNGSTEN (Shock Lock™)

Best used in dry, hard or medium ground conditions where floating rocks may be encountered. The perfect all-rounder if you are not sure about what you might encounter.

ROCK (Taper Lock and Rotating)

For very hard ground and tarmac where extra cutting is needed and high wear is expected. Most effective on machines with high down pressure.

PA AUGERS

EXCAVATORS 17 - 45 T

STANDARD HUB OPTION




110mm Square

PA Augers are available in 2.3 metre or 3.3 metre lengths as standard - Please specify when ordering



The PA Range of Augers are the most heavy-duty units available and are available in 2.3 metre and 3.3 metre lengths as standard. Fully flighted versions are available also.

Our standard PA Auger range has a maximum diameter of 1.5m however Augers with a diameter of up to 2.4m can be manufactured on request. Contact our sales office for further information.

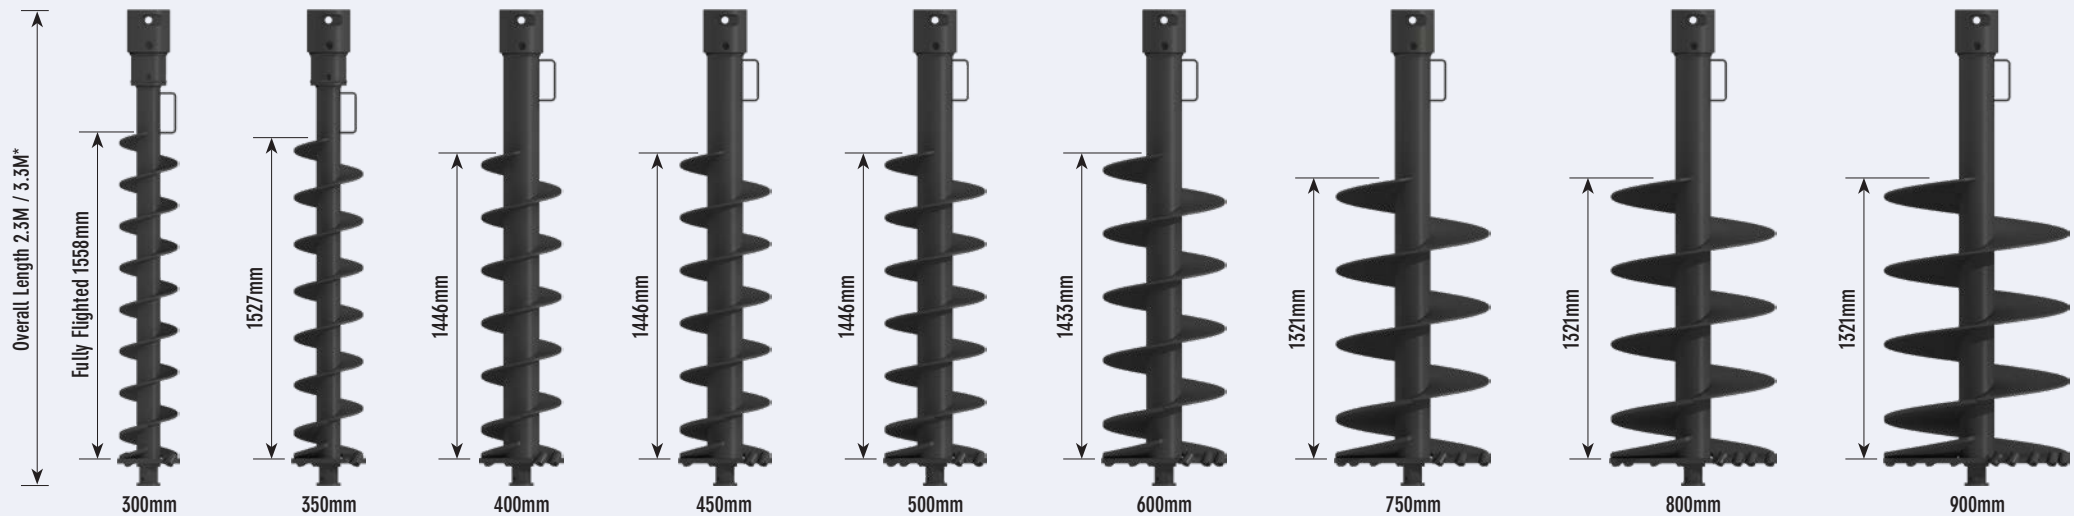

Earth Drill **35 000MAX**

Earth Drill **42 000MAX**

Earth Drill **65 000MAX**

EARTH WEAR PARTS



ROCK WEAR PARTS




The PA Rock Pilot can be purchased in separate sections or as a whole assembly when buying replacement parts.

BORING HEADS




EXTRAS

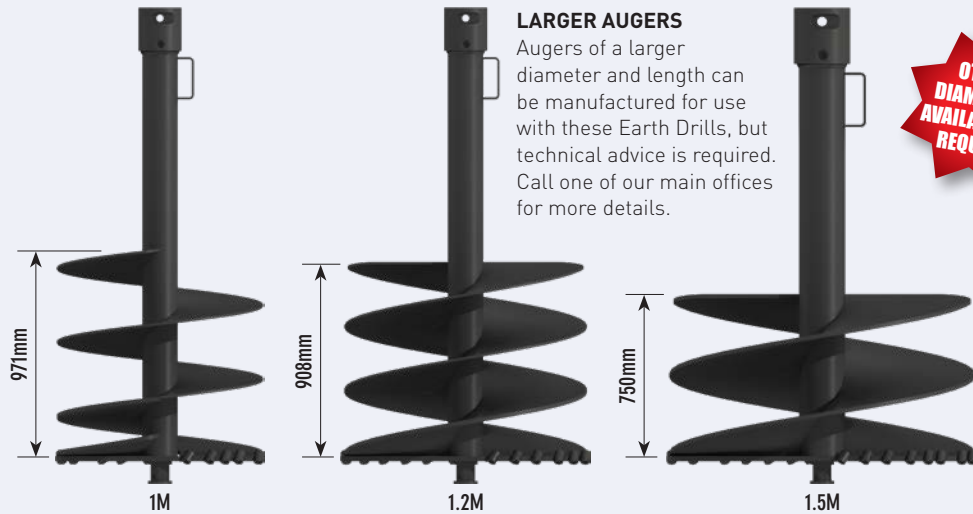


OTHER DIAMETERS AVAILABLE ON REQUEST

Augers over 1.2m - special order up to 1.8m


PA EXTENSIONS

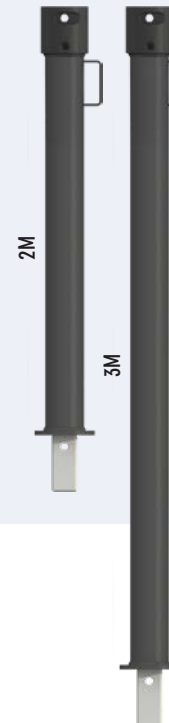

PA TELESCOPIC



Note:
PA Telescopic extensions only suitable for torques up to 42,000Nm.

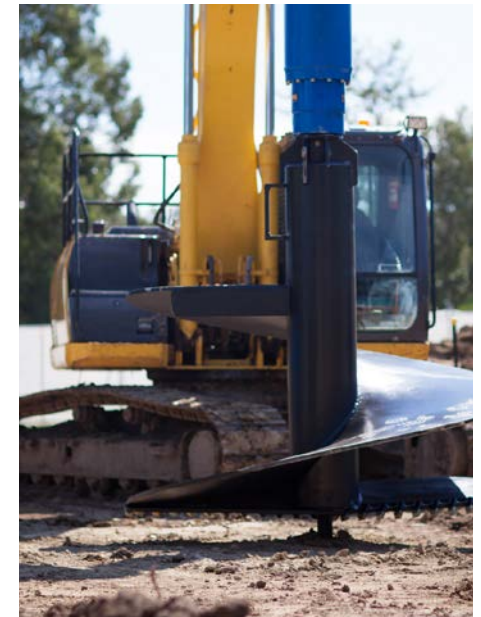

WEAR PARTS FOR GROUND CONDITIONS

EARTH (Taper Lock)

Best suited to soft grounds like earth and clay.

ROCK (Taper Lock and Rotating)

For very hard ground and tarmac where extra cutting is needed and high wear is expected. Most effective on machines with high down pressure.

* Overall Length given includes the auger fitted with wear parts.

For Augers over 1.2 metres diameter please call one of our sales offices for further information.

Hard Rock Auger

For the most demanding drilling situations

The Hard Rock Auger from Auger Torque has been designed and engineered to fulfil the most demanding of drilling situations.

Designed for drilling in fractured hard rock and extremely abrasive conditions. Optimised in direct collaboration with operators specialising in hard rock drilling applications we are excited to offer the Hard Rock Auger Range globally.

A perfect choice for excavators between 10-50T, these augers are designed to get the hole drilled when regular rock augers start to refuse. Made to spec from the highest grade steel, we are confident our hard rock auger range will stand up to the toughest of applications time & time again.

HUB OPTIONS

Hard rock augers are available in 2 popular sizes; 75mm and 110mm square.

HEAVY DUTY TUBE

Heavy wall pipe for rotational strength. 20mm thick starter flights, optional hard facing will ensure this auger performs in the toughest of grounds.

AGGRESSIVE TAPERED CUTTING HEAD WITH ROTATING PICKS

Designed for drilling in hard rock and extremely abrasive conditions.

TAPERED CUTTING PATH

Our cutting heads are designed with a constant spiral cut. Teeth are located so that each tooth makes its own fresh cut on every revolution and are angled to direct spoil towards the centre of the cutting head. The tooth cutting angle ensures spoil is broken up thoroughly to avoid any clogging.

ROCK PILOT AND TEETH WITH ROTATING ROCK PICKS

The hard rock augers are offered with our rotating rock teeth and pilots. Designed so only the rotating picks wear not the pockets/ holders.



**WATCH
VIDEO**

FEATURES

- Drilling performance is increased due to precisely calculated tooth positions along the edges of the cutting head
- Improved productivity when cutting through hard ground and fractured rock
- The positioning of the teeth increases the penetrative forces which can be found on the tooth cutting edge
- This increase in force fractures the substrate into large pieces bringing them to the surface at an increased rate compared to traditional cutting heads

SPECIFICATIONS

We currently offer the following sizes: Ø300mm Ø450mm Ø600mm and Ø750mm

- Rotating Pick Rock Teeth on tapered cutting head
- Standard 110mm Square Hub (PA) & 75mm Square Hub (S6)
- 20mm starter flight & 12mm for remaining flights
- Standard length is 2.4m, custom sizes & continuous flight available
- Custom diameters available on request
- Hard Facing available
- Can be made fully flighted in timed sections (CFA)



High Torque Earth Drills

Part of the heavy duty range in the Auger Torque product line up. Geared towards high torque applications.

70 000MAX & 80 000MAX

These drive units are an ideal option for excavators ranging from 21 to 45T, specifically engineered for high-torque applications. Despite weighing less than 800kg, we've successfully minimized weight for enhanced versatility without compromising the durability our drives are known for. Featuring a large 130mm square or hex shaft, we are confident they will withstand even the most demanding applications repeatedly.

130MM DRIVESHAFT

The driveshaft is crucial for reliability and it goes without saying that the bigger the better applies here. Offered standard as 130mm Square and optional 130mm Hex.

SINGLE PIECE NON-DISLODGE SHAFT

As standard with all of our auger & screw pile drives, our Original single-piece non-dislodgement shaft is of course a standard feature. We are so confident in this must have safety feature that we are covering it with a lifetime warranty.

ROBUST HYDRAULIC MOTORS

Auger Torque's huge buying power means we work closely with high quality suppliers to develop the most reliable attachments available on the market today.

EPICYCLIC GEARBOX

Torque is amplified by using the unique Auger Torque planetary gearbox. This system allows the motors output torque to be multiplied with extreme efficiency as well as ensuring the durability and reliability you need.





EXCAVATORS 21 - 45 T

PA AUGERS 300mm-2.4M Dia

Torque Range: 38,016-71,280 Nm
Oil Pressure Range: 160-300 Bar
Oil Flow Range: 100-280 lpm
Speed Range: 7-19 rpm
Unit Height: 1625mm
Unit Diameter: 524mm
Unit Weight: 750 kg
Output Shaft Std: 130mm Square
Output Shaft Opt: 130mm Hex
Hitch Options: Double Pin Hitch
Double Pin Cradle

(output shaft adaptors available)

Case Drain Line: **Mandatory**



EXCAVATORS 21 - 45 T

PA AUGERS 300mm-2.4M Dia

Torque Range: 46,227-80,898 Nm
Oil Pressure Range: 160-280 Bar
Oil Flow Range: 100-280 lpm
Speed Range: 9-15 rpm
Unit Height: 1625mm
Unit Diameter: 524mm
Unit Weight: 760 kg
Output Shaft Std: 130mm Square
Output Shaft Opt: 130mm Hex
Hitch Options: Double Pin Hitch
Double Pin Cradle

(output shaft adaptors available)

Case Drain Line: **Mandatory**

APPLICATIONS

- Large diameter & deep auger drilling
- Hard Rock Auger drilling
- Core barrel drilling
- Pole and mast installations
- Foundation piles
- Large diameter screw pile installations
- Rail applications
- Exploration & research
- Compatible with excavators from 21T onwards allowing for low impact and reasonably tight access application where typically larger machines would have to be used

*Contact your Auger Torque dealer for auger options.

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
300	12.5M	11.3M	10.2M
350	↓	↓	↓
400	12.5M	11.3M	10.2M
450	12M	10.9M	9.9M
500	12M	10.9M	9.9M
600	11.5M	10.4M	9.4M
750	10.5M	9.5M	8.6M
800	10.5M	9.5M	8.6M
900	10M	9.1M	8.2M
1000	9.5M	8.6M	7.8M
1200	8.8M	8M	7.3M
1500	8M	7.3M	6.6M
1800	7M	6.4M	5.8M
2000	6.3M	5.7M	5.2M
2200	5.8M	5.3M	4.8M
2400	5.3M	4.8M	4.4M



Optional
130mm Hex



Double Pin
Cradle Hitch

GUIDE TO DRILLING PERFORMANCE*

AUGER DIA (mm)	DRILLING DEPTH IN METRES**		
	SOFT	MEDIUM	HARD
300	13.0M	11.8M	10.7M
350	↓	↓	↓
400	13.0M	11.8M	10.7M
450	12.5M	11.4M	10.4M
500	12.5M	11.4M	10.4M
600	12M	10.9M	9.9M
750	11M	10M	9.1M
800	11M	10M	9.1M
900	10.5M	9.6M	8.7M
1000	10M	9.1M	8.3M
1200	9.3M	8.5M	7.8M
1500	8.5M	7.8M	7.1M
1800	7.5M	6.9M	6.3M
2000	6.8M	6.2M	5.7M
2200	6.3M	5.8M	5.3M
2400	5.8M	5.3M	4.9M



100 000MAX & 150 000MAX

A perfect choice for excavators between 21-50T, these drive units are designed specifically for high torque applications. With weights under 1.5T, we have managed to keep the weight down for versatility whilst not sacrificing any of the robustness our drives are renowned for. Running a massive 150mm HEX shaft we are confident it will stand up to the toughest of applications time & time again.

150MM HEX SHAFT

The driveshaft is crucial for reliability and it goes without saying that the bigger the better applies here. A shaft is always stronger when machined as a hex and the 150mm diameter is the largest in the industry, especially when looking at compatibility on machine as small as 21T.

AXIAL PISTON MOTOR

Axial Piston Motors allow us to run a single speed motor. By using an axial piston motor with our drive we can have a high speed motor but still achieve high torques through the gearbox multiplication. At maximum flow we achieve 15 rpm.

SINGLE PIECE NON-DISLODGE SHAFT

As standard with all of our auger & screw pile drives, our Original single-piece non-dislodgement shaft is of course a standard feature. We are so confident in this must have safety feature that we are covering it with a lifetime warranty.

EPICYCLIC GEARBOX

Torque is amplified by using the unique Auger Torque Torque planetary gearbox. This system allows the motors output torque to be multiplied with extreme efficiency as well as ensuring the durability and reliability you need.





EXCAVATORS 21 - 50 T

Torque Range: 45,746-100,069 Nm
 Oil Pressure Range: 160-350 Bar
 Oil Flow Range: 100-280 lpm
 Speed Range: 5-15 rpm
 Unit Height: 1623mm
 Unit Diameter: 636mm
 Unit Weight: 1061 kg
 Output Shaft Std: 150mm Hex
 Hitch Options: Double Pin Cradle
 Case Drain Line: **Mandatory**




EXCAVATORS 21 - 50 T

Torque Range: 71,680-152,319 Nm
 Oil Pressure Range: 160-340 Bar
 Oil Flow Range: 100-340 lpm
 Speed Range: 4-12 rpm
 Unit Height: 1863mm
 Unit Diameter: 732mm
 Unit Weight: 1491 kg
 Output Shaft Std: 150mm Hex
 Hitch Options: Double Pin Cradle
 Case Drain Line: **Mandatory**



APPLICATIONS

- Large diameter & deep auger drilling
- Hard Rock Auger drilling
- Core barrel drilling
- Pole and mast installations
- Foundation piles
- Large diameter screw pile installations
- Rail applications
- Exploration & research
- Compatible with excavators from 21T onwards allowing for low impact and reasonably tight access application where typically larger machines would have to be used

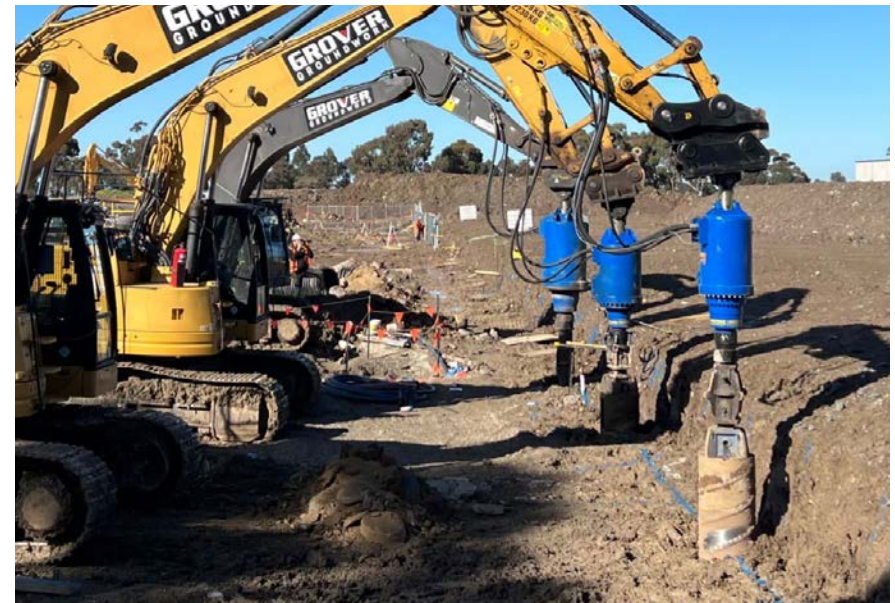

**WATCH
VIDEO**



EXCAVATORS 21 - 50 TONNES

Screw Pile Installations

Many of Auger Torque's Earth Drills, from the robust Earth Drill 10,000 upwards, are excellent tools for screw pile installation due to their high levels of torque and range of rotational speed.



Screw piles can be used as a steel foundation solution for railway and highway installations, masts, towers, cantilever gantries, platforms, lighting columns and sign posts. They support structures in both tension and compression, providing an ideal solution where overturning forces are significant or when ground conditions aren't suitable for other methods of foundation.

Quick and easy to install, in many cases the piles and associated structures can be installed in a day.

Made from galvanised steel, Screw Piles are also maintenance free and reusable after removal from temporary installations.

BENEFITS OF SCREW PILES INCLUDE

- Quick and easy to install
- No concrete mixing or curing time
- No excavations needed or spoil to remove
- Suitable for soft or mixed composite ground
- Installations possible in low temperatures and wet conditions
- Can be installed around existing underground services
- Removable and re-useable



Core Barreling



If required, we can source a full solution including Screw Piles, Core Barrels, Bespoke Augers and Torque Transducers to your own specifications - Talk to your closest Auger Torque main office for more information.

TRENCHER ATTACHMENTS

Features of our Trenchers

HIGH QUALITY MOTOR AND GEARBOX

Using only the highest quality hydraulic motors that allow flow rates of up to 150LPM and then amplified by Auger Torque's own 'bullet-proof' planetary gearbox means that our trenchers have the reliability you need and the power to ensure your trenching is carried out with ease.

EPICYCLIC GEARBOX

Torque is amplified by using the unique Auger Torque planetary gearbox. This system allows the motors output torque to be multiplied with extreme efficiency as well as ensuring the durability and reliability you need.

MULTIPLE TEETH COMBINATIONS

Chains are available in a number of different teeth configurations for trenching in soft ground, mixed grounds and even permafrost, allowing you to get the job done quickly.

ADJUSTABLE DEPTH SKID

A great feature that will make your job much easier is the precision depth control skid, which enables the operator to set the machine at up to three different trench depths.

RAPID CHAIN ADJUSTMENT

Utilising a simple grease point and grease gun, chain adjustment is quicker than ever.

DOG LEG BOOM PROFILE

Provides a larger spacing between chain and boom for improved spoil clearance and reduced boom and chain wear.

HOSE & ADAPTOR OPTIONS

All Trenchers are supplied as standard with high quality hoses and adaptors.



The days of your trenching bucket may well be over.

The laborious task of digging a trench has been transformed since the advent of the Trencher Attachment.

Suitable for Skidsteer Loaders and Excavators, Auger Torque's range of Trenchers cover depths from 0.6 to 1.5 meters and widths up to 350mm. The spoil is piled neatly to one side of the trench by the integral auger.

Experience how Trencher Attachments can make light work of your construction project.

Multiple applications including:-

- Ground Heat Pump Systems
- Drainage & Irrigation
- Gas / Water Piping
- Electrical Cable
- Fibre Optic Cable
- Larger Bore Gas / Water Piping
- Hedge & Tree Planting



**WATCH
VIDEO**



MT Trencher Range





EXCAVATORS 2.5 - 4.5 T & SKIDSTEER LOADERS

For Trenches
300-600mm Depth

Oil Pressure Range: 160-240 Bar
Oil Flow Range: 35-65 lpm
Unit Width: 850mm
Unit Height: 736mm
Unit Length: 1465mm
Cutting Width Range: 100-300mm

Technical data may be subject
to change without notice.

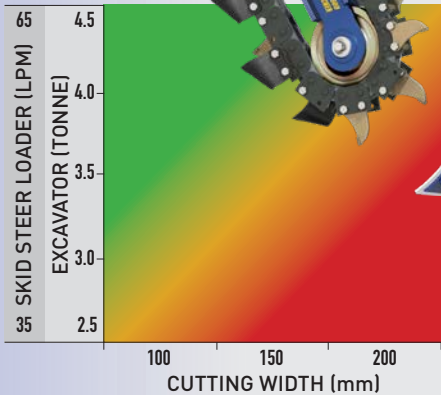
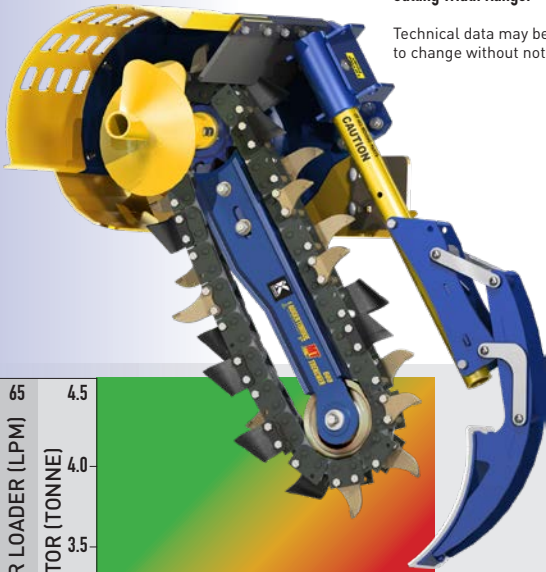


EXCAVATORS 3 - 5 T & SKIDSTEER LOADERS

For Trenches
600-900mm Depth

Oil Pressure Range: 180-240 Bar
Oil Flow Range: 45-80 lpm
Unit Width: 850mm
Unit Height: 736mm
Unit Length: 1800mm
Cutting Width Range: 100-300mm

Technical data may be subject
to change without notice.

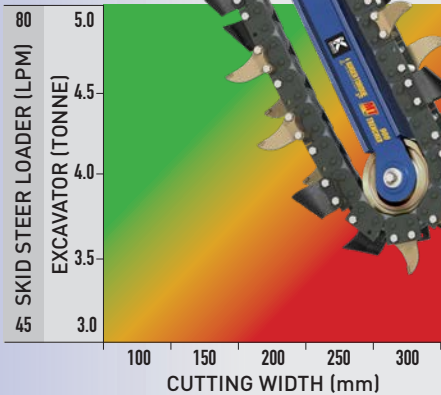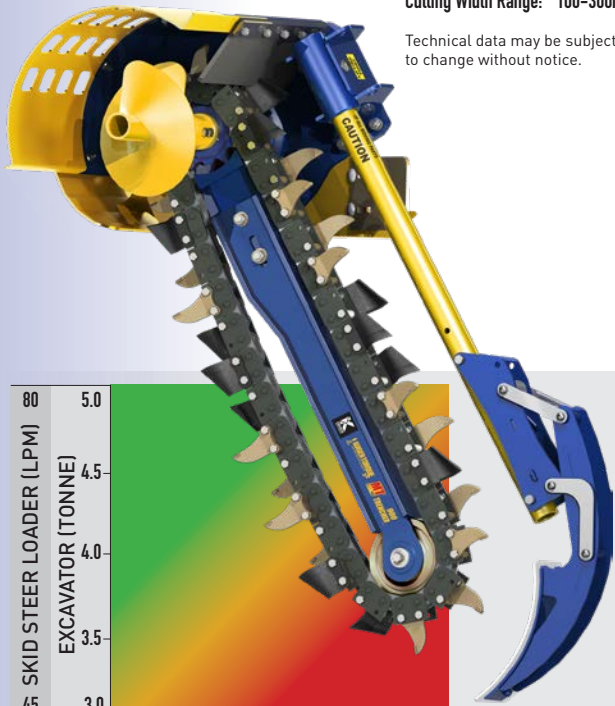

■ IDEALLY SUITED ■ SUITABLE ■ NOT SUITED

EARTH WEAR PARTS



Earth Tooth
Left Hand
44-2010



Earth Tooth
Right Hand
44-2011

TUNGSTEN WEAR PARTS



Tungsten Tooth
Left Hand
44-2001



Tungsten Tooth
Centre
44-2002




Tungsten Tooth
Right Hand
44-2003

BOOM SPARE PARTS




MT Sprocket
42-1096






Nose Roller,
Bearing &
Circlip Kit
42-1900-KIT

TRENCH DEPTH CAPABILITY



Adjustable Depth-control Skid allows for 3 different depth settings



	DEPTH A	DEPTH B	DEPTH C
MT 600	300mm	450mm	600mm
MT 900	600mm	750mm	900mm

MOUNTING HITCH OPTIONS

Three versions of mounting hitches are available;

SIDE SHIFT FRAME

For Skidsteer Loaders

MINI LOADER FRAME

for Mini Loaders

EXCAVATOR HITCH

Available in several pin sizes to fit most machines.

Pin diameter options

30mm:	15-53000
35mm	15-53500
40mm	15-54000
45mm	15-54500

GROUND CONDITIONS

EARTH

Best suited to soft grounds like earth and clay.

COMBINATION

Best used in dry, hard or medium ground conditions.

TUNGSTEN

Best used in dry, hard ground conditions.

CHAIN OPTIONS

There are a choice of 3 chain options for each machine to allow for differing ground conditions. Check the chain widths available against Auger Torque charts, price lists and specifications.



EARTH
Soft Ground



COMBINATION
Mixed Terrain




TUNGSTEN
Hard Ground /
Frozen

CHAIN WIDTH OPTIONS

	100mm	150mm	200mm	250mm	300mm
MT 600 Earth	44-2901	44-2903	44-2905	-	-
MT 600 Combination	44-2902	44-2904	44-2906	-	-
MT 600 Tungsten	44-2918	44-2913	44-2914	-	-
MT 900 Earth	44-2907	44-2909	44-2911	44-2939	44-2933
MT 900 Combination	44-2908	44-2910	44-2912	44-2915	44-2934
MT 900 Tungsten	44-2916	44-2920	44-2921	44-2941	44-2935

* Cutting widths dependent on specific ground conditions

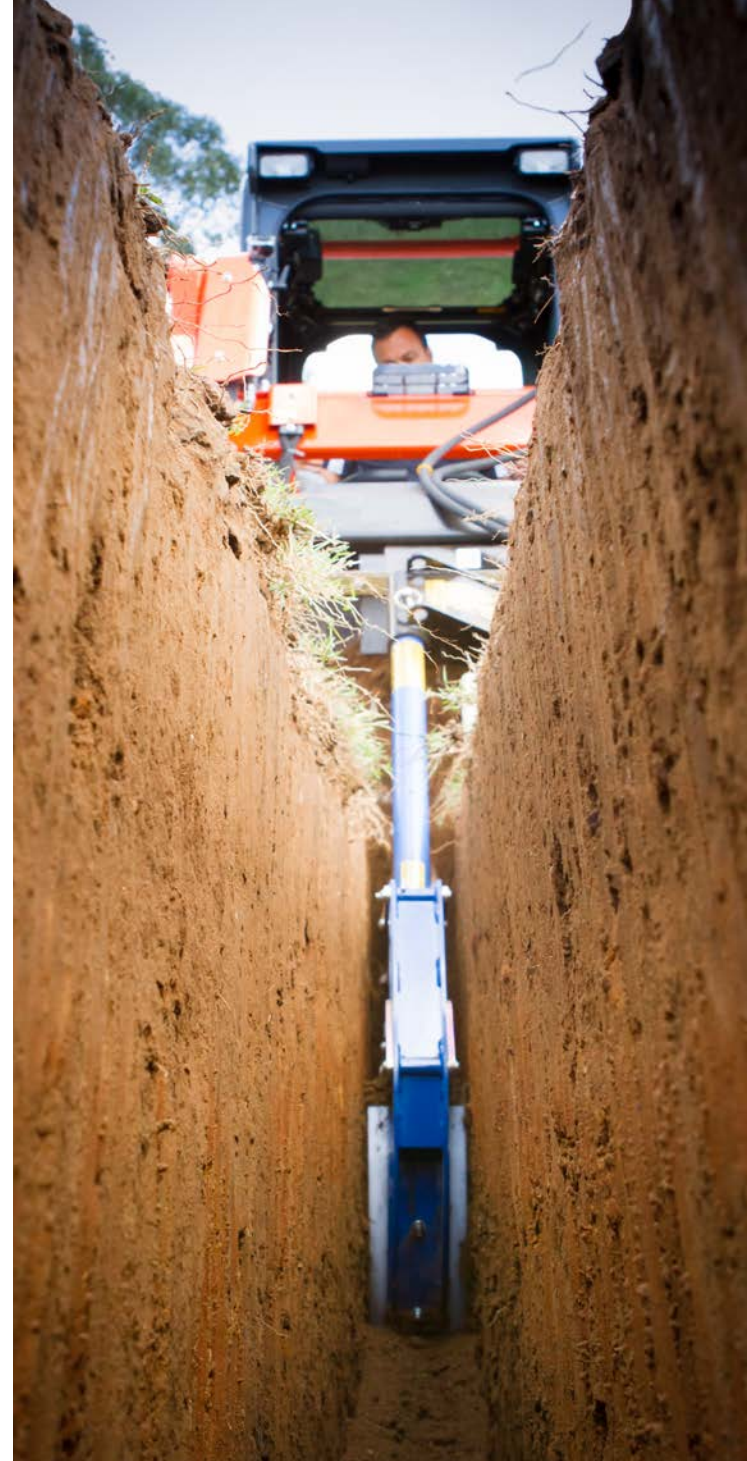

XHD Trencher Range


XHD TRENCHER 900

EXCAVATORS 5 - 10 T & SKIDSTEER LOADERS

For Trenches
600-900mm Depth

Oil Pressure Range: 180-240 Bar
Oil Flow Range: 60-95 lpm
Unit Width: 1018mm
Unit Height: 808mm
Unit Length: 1962mm
Cutting Width Range: 150-350mm

Technical data may be subject
to change without notice.

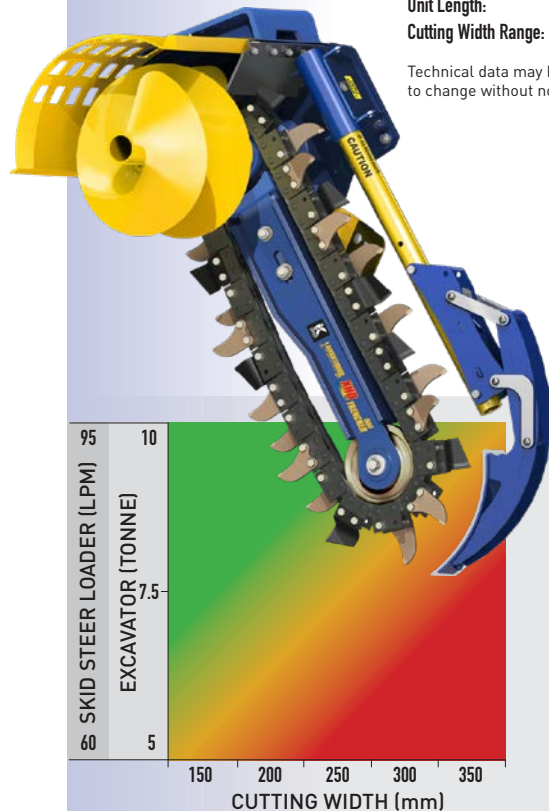


XHD TRENCHER 1200

EXCAVATORS 5 - 10 T & SKIDSTEER LOADERS

For Trenches
800-1200mm Depth

Oil Pressure Range: 180-240 Bar
Oil Flow Range: 70-110 lpm
Unit Width: 1018mm
Unit Height: 808mm
Unit Length: 2262mm
Cutting Width Range: 150-300mm

Technical data may be subject
to change without notice.

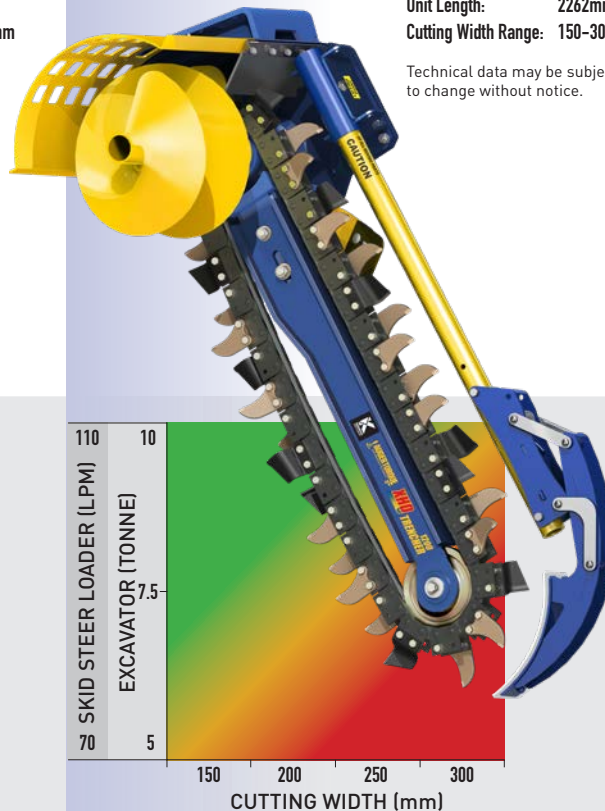


XHD TRENCHER 1500

EXCAVATORS 5 - 10 T & SKIDSTEER LOADERS

For Trenches
1000-1500mm Depth

Pressure: 180-240 Bar
Oil Flow Range: 80-115 lpm
Unit Width: 1018mm
Unit Height: 808mm
Unit Length: 2562mm
Cutting Width Range: 150-200mm

Technical data may be subject
to change without notice.

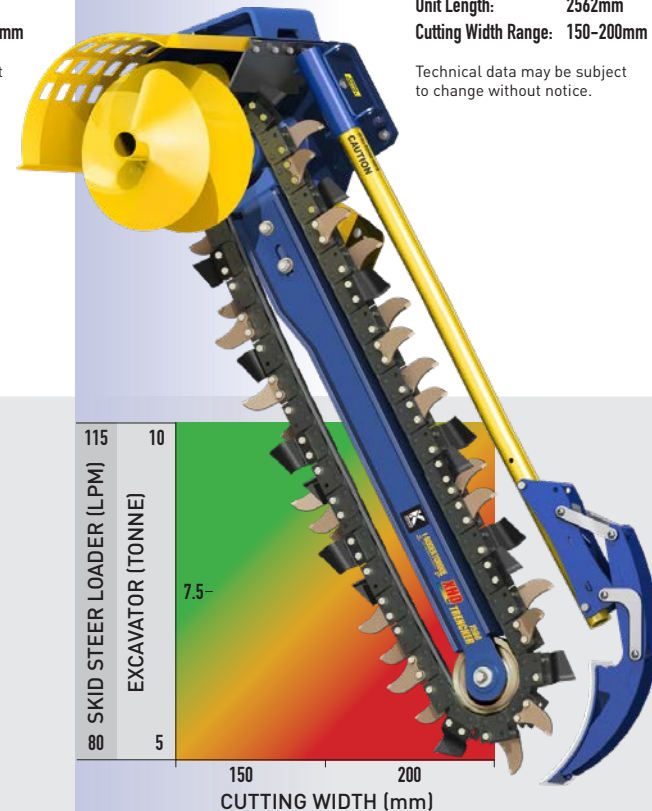

■ IDEALLY SUITED ■ SUITABLE ■ NOT SUITED

EARTH WEAR PARTS




TUNGSTEN WEAR PARTS




BOOM SPARE PARTS



TRENCH DEPTH CAPABILITY



Adjustable Depth-control Skid allows for 3 different depth settings

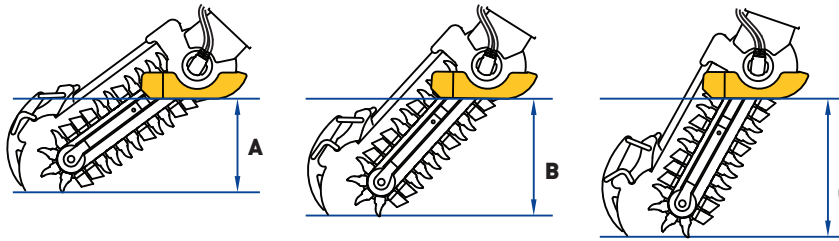

	DEPTH A	DEPTH B	DEPTH C
XHD 900	600mm	750mm	900mm
XHD 1200	800mm	1000mm	1200mm
XHD 1500	1000mm	1250mm	1500mm

MOUNTING HITCH OPTIONS

Three versions of mounting hitches are available;

SIDE SHIFT FRAME

For Skidsteer Loaders

MINI LOADER FRAME

for Mini Loaders

EXCAVATOR HITCH

Available in several pin sizes to fit most machines.

Pin diameter options

40mm	15-64000
45mm	15-64500
50mm	15-65000
55mm	15-65500
60mm	15-66000
65mm	15-66500

GROUND CONDITIONS

EARTH

Best suited to soft grounds like earth and clay.

COMBINATION

Best used in dry, hard or medium ground conditions.

TUNGSTEN

Best used in dry, hard ground conditions.

CHAIN OPTIONS

There are a choice of 3 chain options for each machine to allow for differing ground conditions. Check the chain widths available against Auger Torque charts, price lists and specifications.



CHAIN WIDTH OPTIONS

	150mm	200mm	250mm	300mm	350mm
XHD 900 Earth	44-3904	44-3907	44-3910	44-3913	44-3916
XHD 900 Combination	44-3905	44-3908	44-3911	44-3914	44-3917
XHD 900 Tungsten	44-3906	44-3909	44-3912	44-3915	44-3918
XHD 1200 Earth	44-3922	44-3925	44-3928	44-3931	-
XHD 1200 Combination	44-3923	44-3926	44-3929	44-3932	-
XHD 1200 Tungsten	44-3924	44-3927	44-3930	44-3933	-
XHD 1500 Earth	44-3937	44-3940	-	-	-
XHD 1500 Combination	44-3938	44-3941	-	-	-
XHD 1500 Tungsten	44-3939	44-3942	-	-	-

* Cutting widths dependent on specific ground conditions



Aluminium Ramps


Auger Torque Aluminium Loading Ramps have long set the standard by which other ramps are judged.

With carrying capacities ranging from 1.5 to 8 tonnes, our ramps are overengineered to ensure they can safely accept steel or rubber tracks and pneumatic tyres. This means you no longer need to have individual ramps to cope with various means of traction. One set of Auger Torque Loading Ramps does it all.

We use only the highest grade alloy, ensuring that Auger Torque aluminium ramps will have a long and reliable service life.

All our ramps incorporate a unique design feature which prevents bottoming out when loading or unloading. All ramps are supplied with forged locking pins to ensure safe and secure attachment to the loading plate.

Made in Australia for Australian conditions, best ramps on the market – Now you're talking!

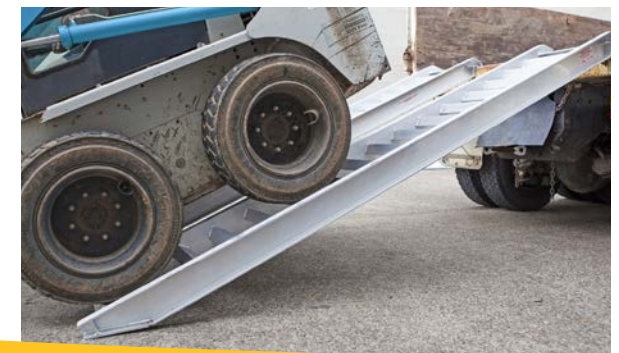

OPTIONS

	1.5 Tonne (2.8m)	3.0 Tonne (3.5m)	4.0 Tonne (3.5m)	4.0 Tonne (3.9m)	4.5 Tonne (3.5m)	4.5 Tonne (3.9m)	5.0 Tonne (3.5m)	6.0 Tonne (3.5m)	8.0 Tonne (3.5m)
Part No:	51-2909	51-2901	51-2902	51-2904	51-2903	51-2907	51-2905	51-2906	51-2908
Track Width:	280mm	325mm	350mm	350mm	425mm	425mm	470mm	500mm	500mm
Max Bed Height:	1m	1.2m	1.2m	1.4m	1.2m	1.4m	1.2m	1.2m	1.2m
Weight (per ramp):	24kg	30kg	36kg	40kg	40kg	47kg	49kg	55kg	68kg
Suitable for:	Steel Tracks, Rubber Tracks and Pneumatic Tyres	Steel Tracks, Rubber Tracks and Pneumatic Tyres	Steel Tracks, Rubber Tracks and Pneumatic Tyres	Steel Tracks, Rubber Tracks and Pneumatic Tyres	Steel Tracks, Rubber Tracks and Pneumatic Tyres	Steel Tracks, Rubber Tracks and Pneumatic Tyres	Steel Tracks, Rubber Tracks and Pneumatic Tyres	Steel Tracks, Rubber Tracks and Pneumatic Tyres	Steel Tracks, Rubber Tracks and Pneumatic Tyres

Skid Steer Loader Pallet Forks

Ideal for site locations where pallet handling is needed but the site is unmade or too rough for a fork lift truck.

FEATURES

- Large range of tine options available up to 2000 Kg's
- Fully adjustable tines with locking pins
- Tines are fixed at the top and heel preventing bouncing while carrying loads
- High visibility brick guard giving you good vision whilst loading and unloading - crucial in a safety conscious age
- Side step for easy entry and exit of the cab
- Can be disassembled and packed into a compact storage space when not in use



PALLET PF1500 FORKS

Weight Capacity:	1500kg
Tine Height:	550mm
Tine Width:	80mm
Tine Length:	1070mm
Tine Thickness:	40mm

MEDIUM CAPACITY PALLET FORKS

Assembled Height:	930mm
Assembled Width:	1185mm
Assembled Length:	1340mm
Kit Weight:	176kg

Technical data may be subject to change without notice.

PALLET PF1800 FORKS

Weight Capacity:	1800kg
Tine Height:	550mm
Tine Width:	100mm
Tine Length:	1220mm
Tine Thickness:	40mm

HIGH CAPACITY PALLET FORKS


Assembled Height:	930mm
Assembled Width:	1185mm
Assembled Length:	1490mm
Kit Weight:	196kg

Technical data may be subject to change without notice.

Mixer Bowls

Available with a 180 Litre capacity, the Auger Torque Mixer Bowl attaches quickly and easily to our Earth Drills.

Mixing in inaccessible areas where stand alone machines are not practical has never been easier. Skidsteer and Excavator mount brackets are available. A Mixer Bowl is the perfect addition to our Mini Loader Earth Drill range.

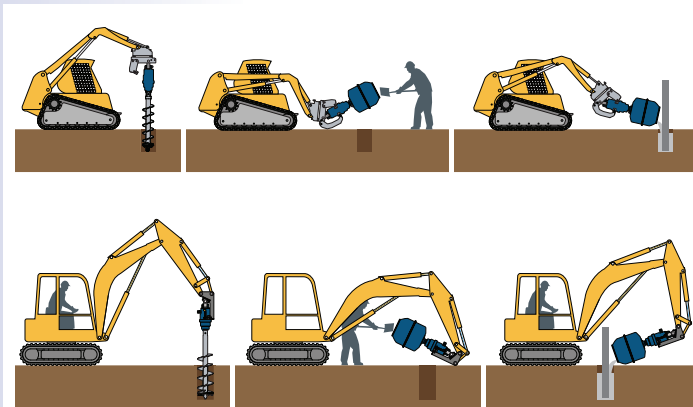

Ideal for fencing contractors, with the aid of the Mixer Cradle Hitch the Auger can be quickly removed and the Mixer Bowl attached and locked in place with the standard Auger Pin. After the concrete has been laid the Auger can be replaced for the next post.

When used on Skidsteer machines the mixer bowl requires the use of a mixer cradle that is mounted easily to any of our Skidsteer loader frames.



MIXER CM 180 **BOWL**

**EXCAVATORS 1 - 8 TONNES,
MINI LOADERS &
SKID STEERS**

Machine Compatibility:	X1500 - 7000MAX
Bowl Capacity:	180 Litres
Unit Depth:	690mm
Unit Diameter:	724mm
Unit Weight:	33kg

Technical data may be subject
to change without notice.



Cone Crusher Bucket

The new Auger Torque Cone Crusher Bucket provides a simple, efficient, and cost-effective way to reprocess and/or recycle small volume construction rubble and debris, into usable aggregate/hardcore.

FEATURES

- Easy to use and compact for small working sites
- Compatible with excavator, backhoe, mini loader, telehandler and skidsteer
- Bucket mouth allows for effective scooping and sorting
- Seven sided rotating cone inside a cylindrical drum
- Grinding faces made in steel and tungsten carbide
- Built around a series 3.5 sub gearbox
- Auger Torque's industry leading warranty

APPLICATIONS

- Rubble crushing and hardcore creation
- Recycling and repurposing waste
- Use to crush house bricks, breeze blocks, concrete pavers, asphalt, natural limestone, poured concrete and more
- Suitable for, and not limited to, grounds maintenance, forestry road and farm track repair, agriculture and repurposing outbuildings

Hose Guiding Plates - For safe routing of hydraulic hoses between parent machine and Cone Crusher attachment.



Front Loader



Excavator



**WATCH
VIDEO**



Carrier Machines	Excavators 3-10T Backhoe Mini Loader Skid Steer Telehandler	Unit Length Unit Width Unit Height Drum Diameter Unit Weight	1300 mm 761 mm 629 mm 600 mm 376 kg
Torque Range	6320-10112 Nm	Hitch Options	Double Pin Mounting Frame
Oil Pressure Range	150-240 bar		
Oil Flow Range	50-150 lpm		
Speed Range	26-57 rpm		

MATERIAL THROUGHPUT

Material Throughput


Mixed material throughput = up to 5 tonne per hour.

Brick throughput = up to 9 tonne per hour.

Output material = up to 60mm.



BEFORE

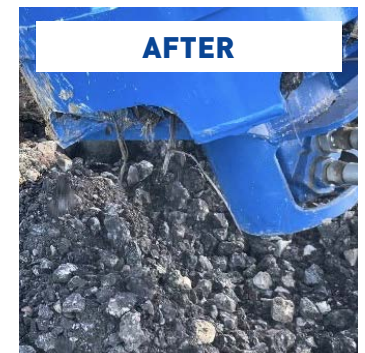

AFTER

Drum Cutter

The KDC-Series features a robust spur gearing and is driven by high torque motors – the range is also equipped with gear a reduction facility to increase overall cutting force.

The optimal drum and pick choice guarantees high performance levels in the toughest environments – in both loosening material and reducing overall wear.

Componentry has been specifically selected to provide maximum penetration and minimum vibration/noise levels. A heavy duty sealing system means working underwater to a depth of 20 metres is also possible.

FEATURES

- Low noise and vibration levels
- Robust spur gear for maximum performance
- Waterproof to 20m
- Different adapters available
- Adjust hydraulic motor to suit excavator
- Fast, easy exchange of wear parts
- Large drum and pick assortment
- Optional 360° rotation for greater access



MODELS

	KDC04	KDC06	KDC08	KDC15	KDC20	KDC30	KDC35	KDC45	KDC60
Carrier Weight, T	2-4	4-6	6-8	8-15	15-20	20-30	30-35	35-45	45-60
Product Weight, kg	210-230	210-230	210-230	430-450	815	1350	1420-1460	2450	2600
Total Length, mm	700*	700*	700*	835	965*	1095	1095	1345	1345
Drum Dimensions, mm (width x diameter)	500 x 325*	500 x 325*	500 x 325*	630 x 390*	750 x 550*	900 x 615	900 x 615	1200 x 760	1400 x 760
Connecting Plate, mm (width x length)	220 x 320	220 x 320	220 x 320	405 x 415	410 x 530	503 x 600	503 x 600	580 x 740	580 x 740
Nominal Power, kW	18	18	22	30	45	60	90	120	140
Oil Flow Range, lpm	30-65	40-65	50-65	70-120	100-190	120-210	240-340	250-500	360-600

*drum cutters can be fitted with a profiling drum – ask your local Auger Torque dealer.

Hedge Trimmer

The Auger Torque Hedge Trimmer is the perfect addition for excavators (1.5T - 8T) and Skidsteer loaders, and offers a variety of motor sizes to suit your application.

The newly designed mounting frame allows you to quickly switch the Hedge Trimmer between the left and right hand side of the parent machine. When fitted to a Skid Steer, it can also be used to cut grass and brush. Attaching the optional tooth extension provides a full 2.5m cutting length. This is sure to make trimming more precise, efficient and will provide yet another way to expand the versatility of existing machines.

FEATURES

- Suits 1.5 to 8T excavators and Skid Steer Loaders
- Variety of motor sizes: 50cc, 80cc, 100cc
- 1.5m cutting length
- 1m cutting extension (optional)
- Quickly switch between left and right side cutting
- Cut branches up to 40mm diameter
- Replaceable cutting teeth
- Neat and accurate cut
- Low maintenance
- High performance
- Hoses included
- Extremely durable
- Delivered ready to use



T150

Oil Pressure Range - 50 / 80 / 100cc: 150-220 Bar

Oil Flow Range 50cc: 30-48 lpm

80cc: 40-68 lpm

100cc: 50-71 lpm

Suitable For 50cc: 1.5-2.5 T Excavators & SSL

80cc: 2.5-4.5 T Excavators & SSL

100cc: 4.5-8 T Excavators & SSL

BLADE LENGTH: 1500mm

Max. Cutting Thickness: 40mm

Unit Width: 1537mm

Unit Height: 292mm

Unit Depth: 357mm

Unit Weight: 68 kg

Hitch Options: Double Pin Hitch / Skid Steer Frame

Hoses Included: Yes

EXTENSION

Suitable For 50cc: Not suitable for extension use

80cc: 2.5-4.5 T Excavators & SSL

100cc: 4.5-8 T Excavators & SSL

Blade Length: 1000mm

Unit Width: 1058mm

Unit Height: 120mm

Unit Depth: 217mm

Unit Weight: 26 kg

Variable Mulcher

Suitable for excavators and skid steer loaders, these mulchers are designed and manufactured to handle the toughest clearance applications through to precise hedge trimming.

What really makes this mulcher unique is the option of different drums, so whatever the job at hand you can easily switch between the options, providing the ultimate solution for all your land clearing needs.

VM1000

Standard Gear Motor
Oil Pressure Range: 160–180 Bar
Oil Flow Range: 60–70 lpm
Suitable For: 5T – 10T Excavators
Skidsteer Loaders

Drum Cutting Width: 1000mm
Drum Speed: 2400rpm (machine dependant)
Max. Log Dia: 120mm
Unit Width: 1229mm
Unit Height: 529mm
Unit Depth: 794mm
Unit Weight: 400 kg

VM1500

Standard Piston Motor
Oil Pressure Range: 220–240 Bar
Oil Flow Range: 85–95 lpm
Suitable For: 10T – 15T Excavators
Skidsteer Loaders

Drum Cutting Width: 1500mm
Drum Speed: 2400rpm (machine dependant)
Max. Log Dia: 250mm
Unit Width: 1820mm
Unit Height: 953mm
Unit Depth: 994mm
Unit Weight: 800 kg



FEATURES

- Working width options of 1m and 1.5m
- Interchangeable drum - Easily swapped onsite
- Fixed tungsten and swinging hammer tooth options
- Optimised cutting teeth preventing drum stall
- Heavy duty steel construction
- Heavy duty bearings and triple belt system
- Hinged door for easy drum access
- Replaceable skid plates

APPLICATIONS

- Ground clearance
- Woodland pathway creation and maintenance
- Clear and maintain vegetation
- Tree and hedge trimming
- Mulch trees and hedges down to ground level
- Fire break creation

TC Range Mulcher


Heavy operations such as bushwood clearance or land maintenance are perfect applications for the TC Range Mulcher.

This attachment is rugged and durable, thanks above all to its reinforced casing with double bottom, which provides outstanding resistance to impacts and torsional forces. The shielded bearings of the rollers protect them from collisions with material in the mulching area. Use this renowned attachment on excavators from 1.5T to 6.5T.

MODELS

	TC1-80	TC1-100	TC2-80	TC2-100
Carrier Weight, T	1.5-3.5	1.5-3.5	3.5-6.5	3.5-6.5
Drum Width, mm	800	1000	800	1000
Unit Width, mm	1000	1200	980	1180
Unit Depth, mm	640	640	810	810
Unit Height, mm	461	461	530	530
Unit Weight, kg	115	125	245	270
Flow Rate, lpm	18-90	18-90	28-90	28-90
Pressure, bar	250	250	250	250
Cutting Diameter, mm	20-30	20-30	40-60	40-60

* per machine capacity

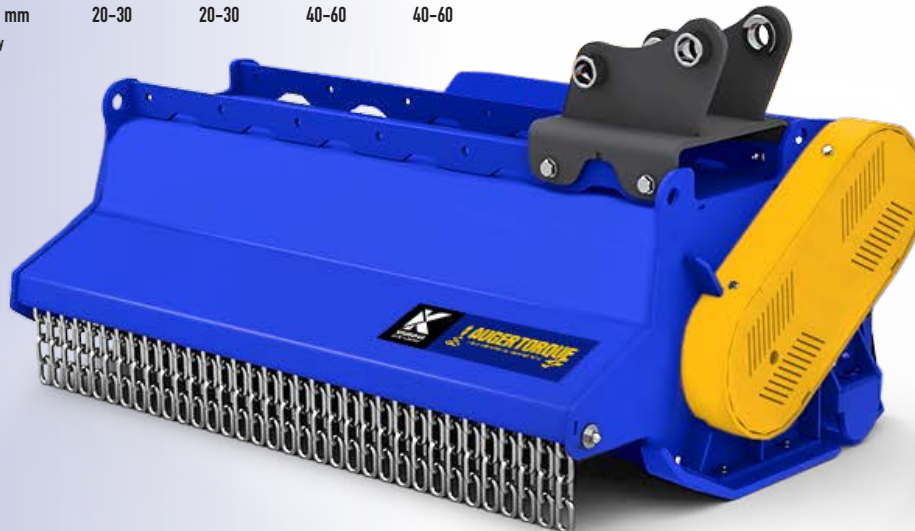

FEATURES

- Shaft equipped with either blade or hammer set up
- Adjustable height support roller
- Robust motor and hoses
- Self levelling frontal plane
- Highly resistant with integrated valve unit as standard

APPLICATIONS

- Ground clearance
- Woodland pathway creation and maintenance
- Clear and maintain vegetation
- Tree and hedge trimming
- Mulch trees and hedges down to ground level

Stump Planers

Removal of tree stumps is a job which, at best, is noisy, messy and time consuming. Traditional methods of removal shower chippings over a wide area making clean up a time-consuming exercise.

With the Auger Torque Stump Planer, tree stumps are removed effortlessly and quietly and clean up time is reduced significantly.

The Auger Torque Stump Planer is the quick and easy attachment to any Earth Drill for the effective, clean removal of tree stumps of any size.

If you need to clear ground in preparation of works or earth drilling there is no better way to remove the remains of trees. Stump Planers are available in numerous sizes with a range of different hub options for different demands.

Quick and easy with minimal mess compared to traditional stump grinding makes this a must-have product for those working in ground preparation and woodland maintenance.



Hardened Steel blades



Hardened Steel pilot



Stability bars



STUMP SP250 PLANER

EXCAVATORS 2.5 - 5 TONNES & SKIDSTEERS

Earth Drill Compatibility: X2500 - 4500MAX
Diameter: 250mm
Length: 635mm
Hub Options: 65mm Round / 75mm Square
Unit Weight: 25 kg

Technical data may be subject to change without notice.



The unique pilot engages with the top surface of the tree stump drawing the tool down allowing the blades to engage with a clean horizontal cut.

STUMP SP350 PLANER

EXCAVATORS 4.5 - 8 TONNES & HIGH FLOW SKIDSTEERS

Earth Drill Compatibility: 4500MAX - 8000MAX
Diameter: 350mm
Length: 675mm
Hub Options: 65mm Round / 75mm Square
Unit Weight: 33 kg


Technical data may be subject to change without notice.



As the blades rotate they shave the wood into a tidy pile and pull the planer down further.




Stump removal is now a clean and quiet operation which can be performed quickly and efficiently by a single operator.



MULTI-PASS CUTTING PATTERN

Tackle very large tree stumps with ease by making multiple cuts in a spiral pattern, starting from the outside and working towards the centre.

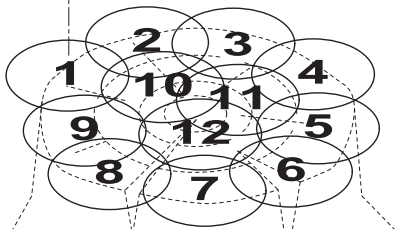

When the planer has achieved a deep cut, reposition to overlap the first hole and repeat the process until all of the stump is removed.

Log Splitter

It's quick and efficient. Augertorque's new Log Splitter for processing and recycling logs.

The compact and robust Log Splitter makes light work of processing those fallen trees into manageable pieces.

As the Log Splitter rotates, the self-guiding threaded body engages with the timber and draws the splitter into the log. The conical shape quickly works its way through the log, splitting the log in two. For larger logs, the Splitter can be repositioned to continue the split along the whole length of the log.

LOG SPLITTER

**EXCAVATORS 1 - 8 TONNES
TELEHANDLERS & SKIDSTEERS**

Earth Drill Compatibility:	X1500 - 8000MAX
Diameter:	180mm
Length:	300mm
Hub Options:	65 Round (75mm square adaptor available)
Unit Weight:	14.6 kg

Technical data may be subject to change without notice.



Log Splitter Hitch with Locking Kit



KINSHOFER GROUP

Auger Torque. Part of the Kinshofer Group.

The Kinshofer Group is one of the world's leading designers and manufacturers of attachments for construction machinery, such as excavators, backhoe loaders, skidsteer loaders, knuckle boom cranes and forklift trucks.

The Kinshofer Group is a One-Stop-Attachment-Shop to our customers around the globe.

Day in and day out, all year 'round, people's decisions and needs create demand for transport and infrastructure solutions. Without the type of product and services the Kinshofer Group provides, the societies, where many of us live, would not function.

Find a wide range of attachments for excavators here and even more on the Kinshofer website www.kinshofer.com

Kinshofer. Simply moving the world with us.



25 companies and 13 brands with more than 4,500 products for loader cranes, excavators and skidsteers

Notes



Auger Torque Australia Pty Ltd

481 Boundary Road, Darra, Queensland 4076, Australia

Phone: 13 22 12 International: +61 (0)7 3274 2077

Fax: +61 (0)7 3274 5077

Email: sales@augertorque.com.au

Connect with us via



augertorque.com.au

Products and specifications subject to change without prior notice.

Some products may not be available in your country or region.

AUGER TORQUE, SHOCK LOCK™, NDST™ and the AUGER TORQUE LOGO are trademarks of Auger Torque Australia Pty Ltd © 2025 Auger Torque Australia Pty Ltd. All Rights Reserved.

YOUR NEAREST DEALER IS